



## 2024 PRODUCT GUIDE

CATTLE ♦ BISON ♦ EQUINE ♦ RODEO ♦ PARKS

BETTER BY DESIGN



Celebrating 50 Years! 1974 -2024

Entering our 50th anniversary year, we are deeply appreciative of the remarkable community that has made Hi-Hog a trusted name in the industry.

Half a century ago, Hi-Hog was founded by Albert and Ann Kneeshaw, with a vision to provide top quality farm and ranch equipment to hardworking individuals. It's a journey that started with manufacturing Hog Pens and Horse Stalls and has expanded with the most respected line of Cattle and Bison Handling Equipment in the industry.

Our dedicated team has been the heart and soul of Hi-Hog's success. From the skilled workers who build our equipment to the customer sales representatives who assist you, and every individual behind the scenes, our employees have poured their passion and dedication into every product we offer. They are the backbone of our company, and we extend our heartfelt gratitude to each one of them for their tireless efforts.

Our valued customers and dealers have been the driving force behind our continued growth and innovation. Your trust in Hi-Hog's products and your loyalty to our brand have been the cornerstones of our success. We understand that our equipment plays a vital role in your daily operations, and we are honored to be your chosen partner in this journey. Your support over the past 50 years has been nothing short of inspiring, and we are deeply thankful for your continued trust.

As we embark on a new era in Hi-Hog's history, our commitment to excellence remains unwavering. We are dedicated to continuing our tradition of building the finest farm and ranch equipment in the industry. With advancements in technology and a renewed focus on sustainability, we are excited about the future and the opportunities it presents. We will continue to innovate, improve, and provide you with the best equipment possible.

Here's to 50 years of hard work, dedication, and success, and to many more decades of serving the needs of our farming and ranching communities. Thank you for being an essential part of the Hi-Hog story. Together, we've built something truly special, and the best is yet to come.

Kurt R. Feigel

President

Hi-Hog Farm & Ranch Equipment



## NEW Multi-Use

<b>4</b>	Transport Trailer	
	Overview	04
	Trailer & Bison Chute	05
	Multi-Use Trailer Details	17

## Bison Equipment

<b>6</b>	Hydraulic Squeeze	06
	Manual Squeeze	06
	Bison System Design	07

## Cattle Chutes

<b>8</b>	Hydraulic Squeeze	08
	Power Packs	09
	Manual Squeeze	10
	Headgate Options	12
	Self-Catch Headgate	13

## Cattle Chute Head Holder

<b>14</b>	Hydraulic Squeeze	14
	Manual Squeeze	15

## Cattle Handling Equipment

<b>16</b>	Squeeze Replacement Parts	16
	Multi-Use Transport Trailer	17
	Palpation Cages / Options	18
	Crowding Tubs	19
	Alley Components	20
	Pin to Pin Component Dimensions	26
	Livestock Loading Chute	27

## Cattle Handling Systems

<b>22</b>	S-Alley / U-Alley	22
	Combination Alley / Double Alley	23
	Sample Cattle Handling Systems	24
	Adjustable S-Alley Handling System Components	29
	Hi-Hog History - Pull Out	30
	Hi-Hog's Ultimate Handling System Components	32

## Paddock Slabs

<b>38</b>	Paddock Slab Footing	38
	Bull Tipping Table	38

## Calving Equipment

<b>34</b>	Calving Chute	34
	Calving Enclosure	35
	Calf Alley	36
	Calf Tipping Table	37
	Calf Sorting Gate	37

## Panels & Gates

<b>39</b>	Panels & Panels with Gates	40
	Gates & Gate Closure Options	42
	U-Frames	44
	Overhead Frames & Gates	45
	Cattle Gates / Oilfield Panels	46

## Livestock Feeders

<b>47</b>	Bale Spears	47
	Nifty Roll Out Feeders	47
	Fence Line Feeders	48
	Feeder Panels	48
	Multi-Bale Feeders	48
	Round-Bale Feeders	49

## Equine Equipment

<b>50</b>	Box Stalls	50
	Foaling Partitions	51
	Stall Hardware	51
	Tie Stalls	52
	Portable Event Stalls	52
	Portable Folding Corral	53
Round Pens	53	

## Rodeo Systems

<b>54</b>	Bucking Chutes	54
	Timed Event Box	55
	Timed Event Sorting	56
	Rodeo System Layout	57

## Park Equipment

<b>58</b>	Bleachers	58
	Picnic Tables	58
	Fire Box	58
	Park Bench Frames	59
	UTV Cattle Guard	59

## MULTI - USE TRANSPORT TRAILER

Capable of transporting either the Manual or Hydraulic Bison Squeeze.

With the upgraded spindles, axles and tires there is plenty of capacity to spare.

The Towing Capacity has increased to 5,000 lbs. with a 6-Bolt Hub.

The Tires & Rims are upgraded.


The 5-Bolt Wheel goes to a 6-Bolt Hub, and now carries 2 - 10-Ply Tires with 2,830 lb. Ratings.



## MULTI - USE TRANSPORT TRAILER

The manual winch which connects to a frame and linkage system with four lifting chains, attaches to the squeeze or rack floor brackets.

The Multi - Use Trailer design is now for more than just Squeeze Chutes. It can be used to transport the Feed Dispenser or a Storage Rack, which can be loaded with various Hi-Hog products. Transport your S-Alley Handling System wherever you wish to set up for working cattle.

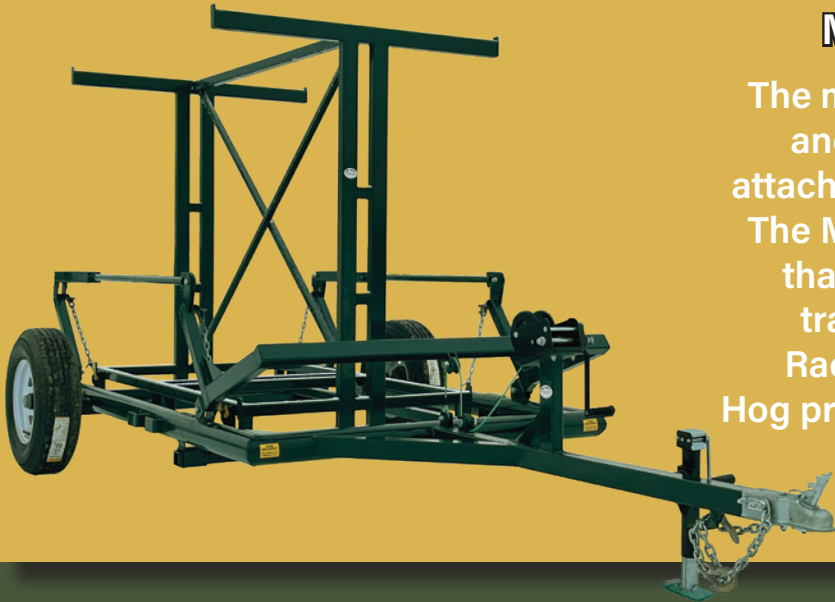

## MULTI - USE TRANSPORT TRAILER

The manual winch connects to a frame and linkage system with four lifting chains, which attach to the squeeze floor brackets.

The design allows the trailer to be backed into place while still being connected with the towing vehicle. Once the squeeze is raised it rests on two crossbars, which are removed during the loading/unloading process. Once loaded, the squeeze is secured in place using two ratchet straps.





# NEW FOR 2024



## #1574 HEAVY DUTY MULTI-USE TRANSPORT TRAILER

Hi-Hog Farm & Ranch Equipment Ltd.



## BISON CHUTES

### Hydraulic Bison Squeeze Chute

with Electric Pump - Item #2367

with Gas Pump - Item #2369

- Full width opening, both front and back
- Quick, safe access to all parts of your animal - both sides
- Hydraulic locks on all circuits allow soft catch but positive lock
- Can do everything from both sides
- 3-way sorting; front and two sides
- Lift-up crash cage allows safe access to both sides of head
- Controls mounted on pivot to allow operation from best visibility and away from animal's sight

Hydraulic Pump options (see page 9)

> Electric Pump (Item #1559)

> Gasoline Pump (Item #1562)



### Manual Bison Squeeze Chute

Item #2360, 3,150 Lbs.


The manual bison chute is built on the same frame as the hydraulic chute shown above. The parallel squeeze, headgate, tail gate, and crash gate are easily operated with manual controls. The crash gate includes a balanced counterweight for remarkably safe and easy operation.





#	BISON ALLEY EQUIPMENT	WEIGHT (LBS)
2367*	Bison Hydraulic Squeeze Chute / Electric Pump	3762
2369*	Bison Hydraulic Squeeze Chute / Gas Pump	3782
2360*	Bison Manual Squeeze Chute	3108
2195*	Bison 3-Way Connector Post - 7' high	14
2330*	Bison Control Alley - Left Spreader with door	340
2295*	Bison Control Alley - Gate in frame	432
2305*	Bison Control Alley - Roof Panel	127
2315*	Bison Control Alley - Adjustable Side Panel	273
2320*	Bison Control Alley - Right Spreader with door	340
2130*	Bison 10'w x 7'h Sheeted Panel	425
2190*	Bison 5' wide Rolling Door	360
2196*	Bison 4-Way Connector Post - 7' high	14.5
2340*	Bison Control Alley - Interior Spreader	399
2285*	Weigh Scale Platform	436

\* Bison Handling Equipment is built several times throughout the year. All equipment may not be on hand at the time of ordering.

Info on Hi-Hog's bison panels and gates can be found in the panel and gate section of this guide. See pages 42 - 46. Available in lengths from 4' to 16' and both 7-Rail and Sheeted designs.

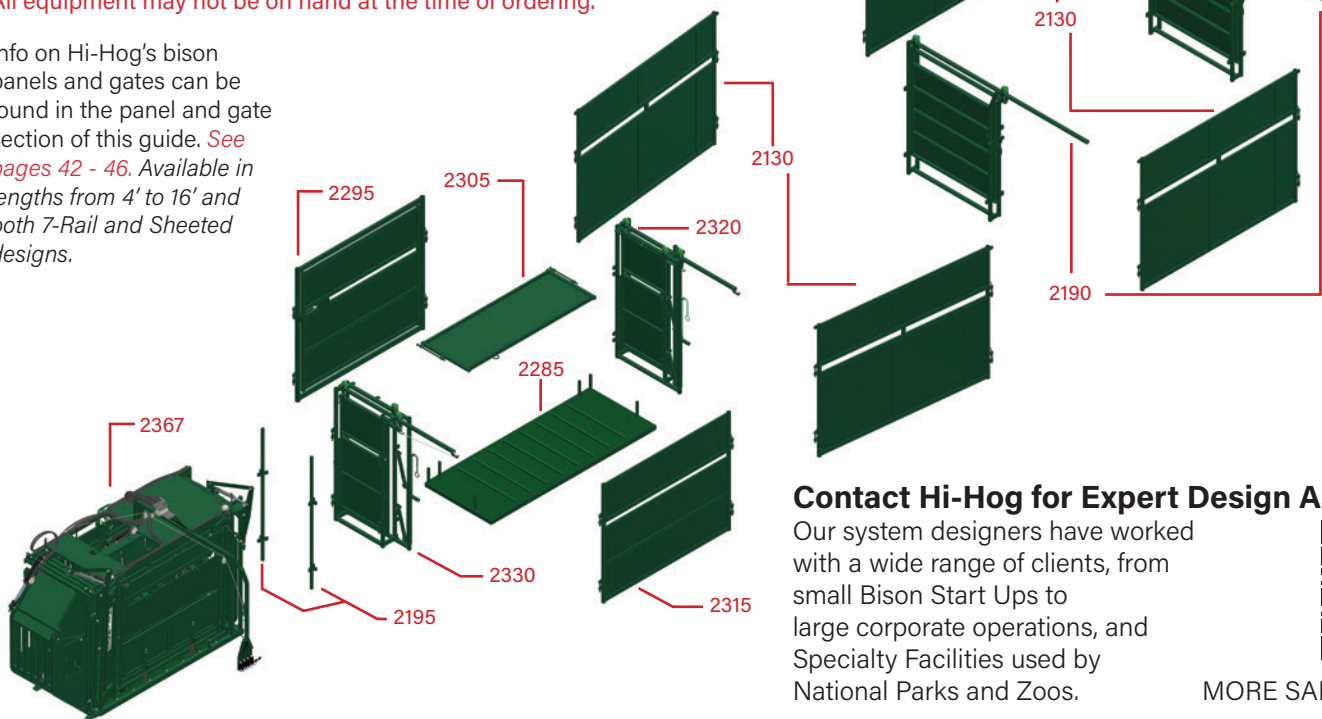

## BISON HANDLING EQUIPMENT

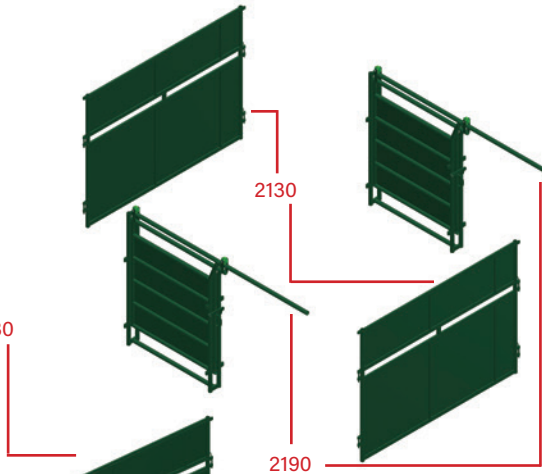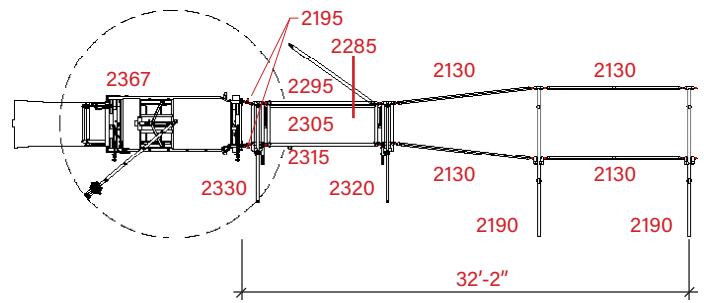

### Contact Hi-Hog for Expert Design Assistance

Our system designers have worked with a wide range of clients, from small Bison Start Ups to large corporate operations, and Specialty Facilities used by National Parks and Zoos.



MORE SAMPLE SYSTEMS



## HYDRAULIC CATTLE SQUEEZE CHUTE

## HEADGATE VIEW



### UNMATCHED ANIMAL ACCESS

#### Hydraulic Squeeze Chute Options

- Manual Head Holder for Hydraulic Squeeze #1535
- Multi - Use Transport Trailer, Item # 1574
- Sternum Bar, Item # 1554
- Hydraulic Head Sweep, Item #1561

- Pivot controls let you work the chute and the animal freely 340 degree rotation
- 4 hydraulic controls; headgate, tailgate, squeeze sides, plus a spare
- Hydraulic locks on each circuit
- Factory set pressures (1200 psi)
- Parallel headgate yolk ensures equal pressure on the animal from the top of the headgate to the bottom
- Heavy duty sheeted headgate and tailgate open fully (30.75" opening)
- Floor door track designed for easy clean-out
- Headgate mounted with contact absorption springs

- Includes removable neck extender
- 2024 Models come with Base Brackets for the # 1574 Multi-Use Trailer Attached.
- Quick access gravity latches can be operated with mitts on
- Primary latches come with locks to prevent accidental opening
- Chute comes standard with 2 side exits
- Sloping sides support your animal while allowing animal to maintain a balanced footing
- Both exits can be opened from the working side of the chute
- Hoof and body access panels open flat against the chute body
- Latches for the body access panels

include locks and guards

- The bottom interior of the chute is enclosed with 12ga Hot Roll
- Sheeted components are caulked for quiet, low stress operation
- Each chute includes 26 grease zerks to ensure reliable smooth operation
- Primary hinge collars are pre-greased with arctic grade grease for extreme weather use
- Premium quality all weather control ropes
- Double Coated, durable polyester powder coat finish
- Rubber latch sleeves reduce noise and vibration for low stress handling



# HYDRAULIC CATTLE SQUEEZE CHUTE

# TAILGATE VIEW



- Electric power pack use:
- Run on 220v power
  - If using 110v, ensure a 20-amp breaker minimum.
  - Do not use an extension cord

*\*Note: Unless otherwise requested, all power packs come wired for 220v power from the factory.*

## Hydraulic Parallel Axis Squeeze Chute

#1556 / electric power pack	2,331 lbs
#1566 / gas power pack	2,351 lbs
#1563 / no power pack	2,204 lbs
Outside Length	118-9/16"
Inside Length	99"
Outside Height	96-1/4"
Inside Clearance	72-1/2"
Base Width	40"
Inside Width - Wide	32"
Inside Width - Narrow	12-1/2"
Weight (chute only)	2,204 lbs

## HYDRAULIC PUMP OPTIONS

Choose the quiet hydraulic pump that best fits your operation; Electric or Gas.

The 2 horsepower Electric Pump is set to pump 1.5 gallons/minute at 1000 psi. The electric pump can be run on either 110 V or, for best performance use 220 V.

The 5.5 horsepower Gas Pump offers 15.2 gallons/minute at low pressure and 3.3 gallons/minute at high pressure.



Electric Hydraulic Pump  
Item #1559, Weight 127 lbs (full tank)



Honda Gas Hydraulic Pump,  
Item #1562, Weight 147 lbs (full tank)



**Animal access**

- Both sides come with side exit gates. The operator can open/close both side exits from the working side of the chute
- Each side exit includes four drop down body gates, two lift-up lower access gates and one removable shoulder/neck access gate
- All access gates can be locked closed
- Body access gates open and lay flat against the side exit gates
- Latches can be opened/closed quickly and safely

**Animal control**

- Parallel squeeze action keeps livestock centered and balanced in the chute
- The sides slope to provide animal support without forcing the animal to narrow their footing
- Two offset locking ratchets provide smooth, continuous squeeze width adjustments from 32" down to 12"
- The rear side drop down panel includes slots for a back-up bar
- Rubber latch sleeves reduce noise and vibration for low stress handling

**Flexible design**

- Squeeze controls can be easily moved from one side of the chute to the other for left-hand or right-hand operation
- Sort three ways; left side exit, right side exit, or straight through the headgate
- The rear tailgate, with built-in counterweight, locks automatically in both the raised and lowered position
- The tailgate includes a long, responsive control rope so the rancher can activate the tailgate while working outside of the animal's flight zone.



### Safe for livestock and operator

- The inside of the side panels are sheeted smooth at the bottom
- The sheeted panels are caulked to absorb vibration and minimize noise
- All gaps are minimized to reduce the potential for livestock injury
- All access gates come with an additional slide latch
- Simple, refined design for smooth, reliable operation
- Heavy duty checker plate steel floor with large 1.25" square traction bars

### Quality parts

Hi-Hog uses premium accessory parts designed to last for the life of your Squeeze:

- Premium 3/8" double braided nylon ropes
- Custom tooled Tivar sheaves
- Hi-Vis, High-grip handle covers
- Heavy duty 1/4" head restraint chair
- Extra heavy duty timing chain
- Grease fittings on all hinge collars

Hi-Hog's parallel axis squeeze chute combines outstanding design, materials and construction to create a safe, rugged, and easy to operate chute with outstanding access and control.

### Manual Parallel Axis Squeeze Chute

Item #	1550	1551	1571
Outside Length	108"	120"	108"
Outside Height	85"	85"	85"
Outside Width	58"	58"	105"
Base Width	40"	40"	40"
Inside Length	96"	96"	96"
Inside Height	72.5"	72.5"	72.5"
Inside Width - Wide	32"	32"	32"
Inside Width - Narrow	12.5"	12.5"	12.5"
Weight (Lbs.)	1,702	1,875	1,840

**Headgate options** see page 12-13


**Squeeze options** see page 16-17

2024 Parallel Axis Squeeze Chute comes with Lifting Brackets attached

## MANUAL HEADGATE

Item #107, 434 Lbs

\*Special Order

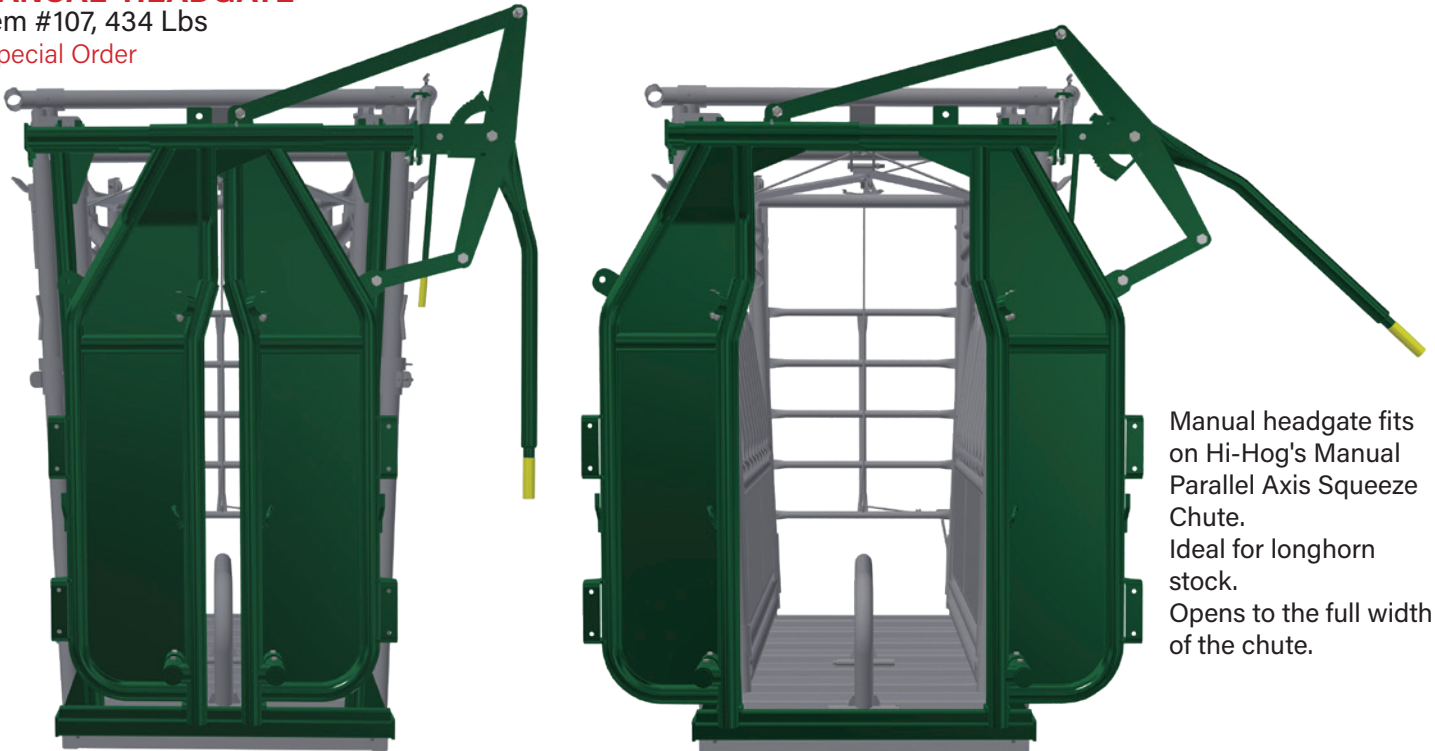

Manual headgate fits on Hi-Hog's Manual Parallel Axis Squeeze Chute. Ideal for longhorn stock. Opens to the full width of the chute.

#107 MANUAL HEADGATE comes with 4 Brackets attached for easy mounting of #1535 Head Holder

## CALVING HEADGATE

Item #110, 239 Lbs

Hi-Hog's Self-Catch Calving Headgate lets the animal catch itself so you can use your time to work the animal.

Set with the Limiter Chain and release with the Headgate Handle. The Overhead Latch works independently forwards and back.

The Self-Catch Calving Headgate fits on Hi-Hog's Calving Enclosure or Calving / Trimming chute.

Quick adjust plungers on the top and bottom of the head gate make it possible to adjust the calving head gate opening on the fly (no tools required).

The three available stanchion openings are 5", 7.75" and 10.5" in width.




## HEAD TIE BAR

Item #126, 16 Lbs

The Head Tie Bar is designed to mount directly to the frame of both the Calving Headgate and PA Squeeze Self Catch Headgate.

Included with #125 Trimming Chute

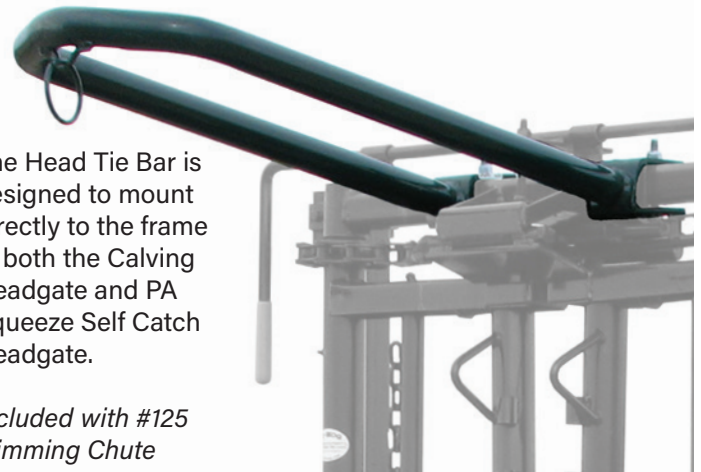

Item #110 - Self Catching Calving Headgate comes standard on Hi-Hog's Calving Pen / Enclosure P. 34

## SELF CATCH HEADGATE

To minimize bruising, the headgate is mounted to the squeeze body with shock-absorbing spring bolts

Extra heavy duty timing chain for smooth dependable operation

The headgate is operated with one simple handle. Push the handle in towards the squeeze and the headgate swings into the squeeze chute. Push the handle forward (the direction out of the squeeze chute), and the headgate will open out

The headgate will swing in or out to the full width of the squeeze chute. This minimizes the risk of hip-lock

Quick adjust plungers on the top and bottom of the headgate You can set the headgate width between 5" and 11". No tools required

Grease fittings on all hinge collars



The stanchions include two safety guards just above the bottle neck. These guards protect the locking plates from being accidentally released by a horn

Auto-catch position is quickly set with the simple limiter chain (shown in red for clarity). Simply push the headgate in to the width that you want and draw the chain in behind the headgate doors and latch the chain in the slotted lock bracket

Headgate handle is available separately (page 16)

The stanchion narrows above 48" to minimize stock from swinging their head up. This bottleneck design remains parallel below this height

The lower chain is available to help secure the head. The chain, with pigtail chain retainers, can be easily set and released

The headgate is sheeted to protect livestock and focus their attention on the exit

Parallel Axis Self-Catch Headgate  
Item #100, 295 Lbs

## NECK EXTENDER

Neck Extender - Item #105, 173 Lbs  
**\*Special Order**

Hi-Hog's Neck Extender is linked directly to the self-catch headgate, allowing the Neck Extender to be activated by the animal's shoulders at the same time the animal contacts the self-catch headgate.

This feature allows the animal to catch itself without a handler at the headgate.

Note: When setting the width of the Neck Extender, ensure that it is set to the same settings as the headgate.



## HEAD SWEEP

Head Sweep - Item #1561, 95 Lbs  
**\*Special Order**

The Hydraulic Head Sweep provides an alternative to the neck extender on Hi-Hog's hydraulic squeeze chute.

Hi-Hog's hydraulic chute includes a spare valve so hook up is simple.

The Head Sweep arm is long enough to prevent stock from ducking under the sweep.


Note: this unit needs to be welded onto the headgate and cannot be used with the Neck Extender in place.



## HYDRAULIC SQUEEZE CHUTE HEAD HOLDER

Manual Head Holder For Hydraulic Squeeze Chute - Item #1535, 108 Lbs

Shown is the # 1563 Hydraulic Squeeze Chute Body and Attached #1535 Head Holder RH (Right Hand Installation, meaning on animal's Right Side) #1535 also fits on the #107 Manual Headgate. Our 2024 Run of #1563 Hydraulic Squeeze Chute Bodies include Mounting Brackets welded on both sides of the Headgate, for the #1535 Head Holder.

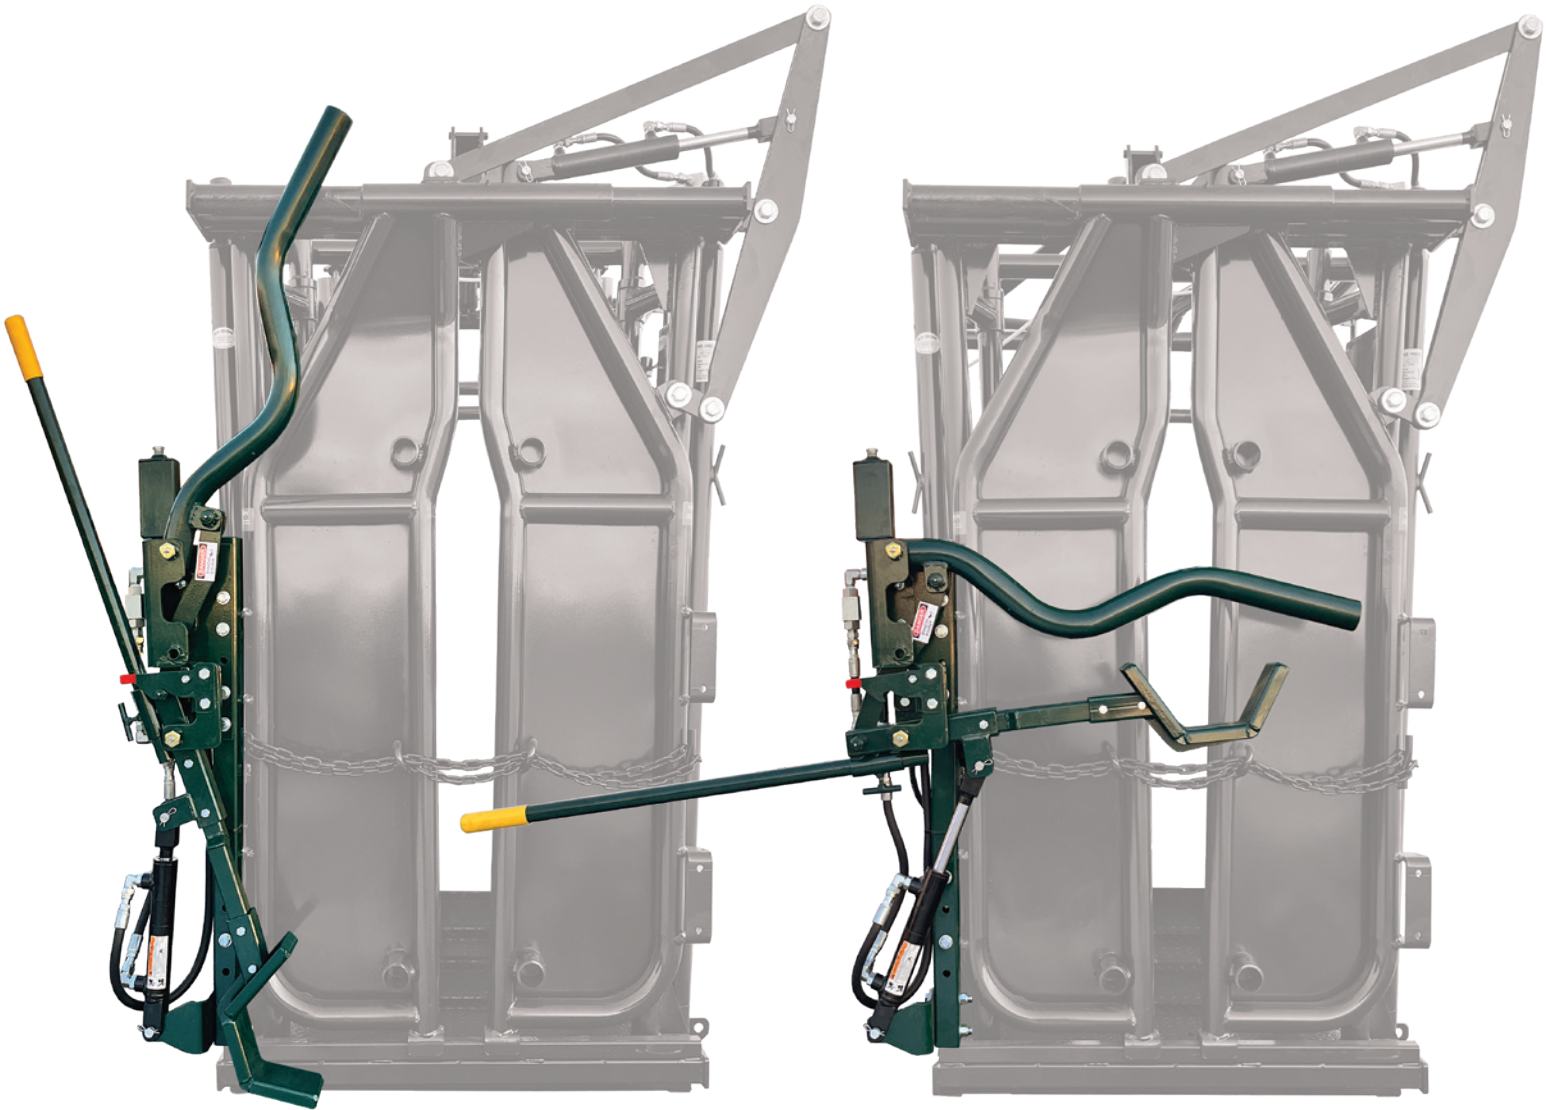

Manual Head Holder For Hydraulic Squeeze Chute and #107 Manual (Scissor) Headgate - Item #1535, 108 Lbs

The #1535 and #1536 Head Holders are manually operated with a self contained Hydraulic Lock Reservoir.



- 3 Height Settings
- One Size fits all
- No spring or friction lock points to wear out and slip during use
- Grease fittings on all primary pivot points
- Can lock in the closed position for optimal handler safety
- If retrofitting a #1556 Hydraulic Squeeze Chute, Brackets must be welded in place for the Head Holder to bolt onto. (Included)

## MANUAL PARALLEL AXIS SQUEEZE CHUTE HEAD HOLDER

Manual Head Holder For Manual P. A. Squeeze- Item #1536, 122 Lbs

Shown is the #1550 with Attached #1536 Right Hand  
(Right Hand side of the animal)



### SAFETY AND SECURITY FOR THE ANIMAL AND THE OPERATOR

With Hi-Hog's Head Holder, you can safely and comfortably secure the animal's head, ensuring minimal movement during procedures. A simple Up / Down Handle will release the fluid in the reservoir and re-apply the lock instantly, without the need to fully open the head holder.

The Red Handle locks the Head Holder in the open position when it is not needed.

- Provides safe, reliable and quiet head control when needed
- Fully reversible for left or right hand operation
- Bolts onto all current or earlier models of Hi-Hog's Parallel Axis Squeeze Chute
- The use of a #1554 Sternum Bar is recommended, but not necessary
- The Secure Hydraulic Lock has it's own reservoir and does not require a pump
- Curved head yoke and cradle provide superior head control without reducing animal access
- Does not interfere with the shoulder access panel
- The One Touch Hydraulic Locking system gives you the secure locking confidence that you don't have with a friction plate slide system
- Plumbed to the reservoir in a closed system, when the handle is closed, the Head Holder is locked
- Locks in both the open and closed position
- Secure Creep Latch to lock in open position.



## RETRO-FIT HEADGATE HANDLE (PA)

Item #1555, 8 Lbs



You can add a retro-fit headgate handle (#1555) to any Hi-Hog PA chute built after January 2003. Installation of this handle will require some cutting and welding. This handle comes with all new PA squeeze chutes. This handle is required when adding a neck extender on your chute.

*Call for installation instructions.*

## HEADGATE HANDLE (PA)

Item #101, 4 Lbs




## TIMING CHAIN SET - OLD STYLE (PA)

Item #103, 5 Lbs



## RATCHET BARS (PA)

Item #1549, 6 Lbs

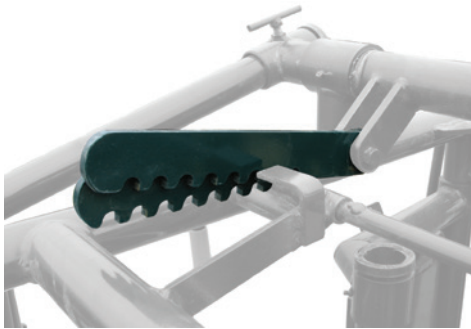

Replacement ratchet plate set of two bars.

## TAILGATE

Item #1546, 24 Lbs



Hi-Hog's Standard Tailgate is installed on all Hi-Hog manually operated squeeze chutes. This is also the same Gate that is used in the assembly of our #37 Alley Spreader with lift-up gate.

## TAILGATE COUNTERWEIGHT (PA)

Item #1547, 9 Lbs

The sheave can be ordered on its own as item #1547-S > (hardware not included)



The tailgate assist kit mounts on the rear frame of your PA squeeze chute and provides a counterweight to make it easier to operate the tailgate.

## SIDE SHEAVE ASSEMBLY (PA)

Item #1552, 1.5 Lbs



## SIDE EXIT BLOCKING BAR

Item #1565, 25 LBS \*special order

The 64" Squeeze Side Exit Blocking Bar can be used when full access to the side of the animal is required.

Two set screws at the top allow you to slide the bar along the inside frame of the squeeze chute and lock it into place.

## SQUEEZE BODY HANDLE (PA)

Item #1544, 7.5 Lbs



The replacement handle can be quickly and easily installed.





**MULTI - USE TRANSPORT TRAILER**

Trailer #1574, 758 Lbs  
 Panel Rack #5538, 419 Lbs  
 Towing Capacity = 5000 Lbs

Trailer  
 Length 15' 10-3/8"  
 Width 7' 6-7/8"

Manual Bison Squeeze Loaded  
 Length 16' 11-11/16"  
 Height 11' 5-11/16"

Hydraulic Bison Squeeze Loaded  
 Length 16' 11-11/16"  
 Height 10' 2-9/16"

Hydraulic Cattle Squeeze Loaded  
 Length 17' 5-3/16"  
 Height 8' 10-9/16"

Manual Cattle Squeeze Loaded  
 Length 16' 10-9/16"  
 Height 7' 10-1/2"



#1574 Multi-Use Trailer with  
 #2360 Manual Bison = 3866 Lbs  
 #2367 Hyd Bison = 4540 Lbs



Lifting Chains / Hooks and Attached  
 Lifting Lugs on 2024 Squeeze Models



#1574 Multi-Use Trailer with #1556 Hyd Squeeze  
 and #1535 Head Holder = 3197 Lbs



Outside of Tire Width  
 = 91"




#1574 Multi-Use Trailer with #5538 Panel Rack = 1177 Lbs



Multi-Use / Rack / Funnel Tub 21' S-Alley  
 = Gross Weight 4212 Lbs, Hitch Weight 458 Lbs

**STERNUM BAR**

Item #1554, 28 Lbs  
 A Sternum Bar encourages livestock to remain on their feet while standing in the cattle squeeze chute.  
 Hi-Hog's Sternum Bar pins into two floor mounted brackets secured to the floor of the chute. The floor brackets can be mounted in two positions, allowing the Sternum Bar to be quickly Installed or Removed.

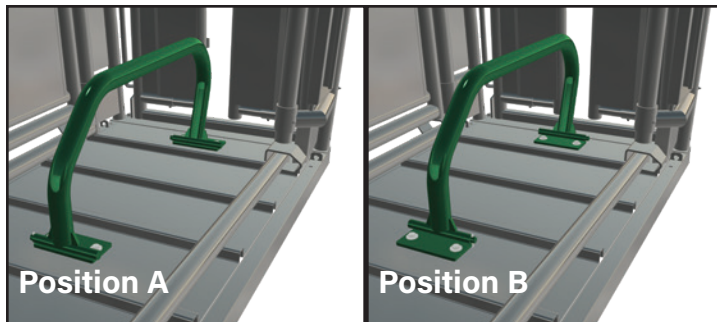

**20" SQUEEZE EXTENSION (PA)**

Item #1537-20 , 195 LBS \*special order  
 The 20" Squeeze Extension pins directly to the back of Hi-Hog's manual Parallel Axis Squeeze Chute.  
 Like the PA Squeeze Chute, the Extension includes a solid floor, sheeted sides, and back-up-bar slots.



## PALPATION AND SORTING OPTIONS

### PALPATION CAGES

Hi-Hog offers both a fixed width, and an adjustable width, Palpation Cage. Both cages include access gates on either side of the alley. These gates come with adjustable plunger latches for quick and secure latching. The gates can be swung in and latched securely across the entrance of the Palpation Cage to block cattle flow and provide safe vet access to the rear of the squeeze chute. The Palpation Cage frames have a width of 32", an inside length of 33.5", and a height of 80". The entry gates are 66" high.

For processing calves, the bottom of the adjustable Palpation Cage side doors swing in and latch securely. When not in use, the lower panels can be latched open, to the full alley width.

- Fixed Palpation Cage - #80, 232 lbs
- Adjustable Palpation Cage - #1560, 292 lbs



#80



#1560

### P.A.S.S. GATE & P.A.S.S. PANEL

The Palpation And Sorting Section (P.A.S.S.) panel and P.A.S.S. gate can be added to your working alley to create an adjustable 4' long alley section that can be used for handler/vet access, sorting animals out of the alley, or diverting stock into another alley.

Hang the P.A.S.S. panel or P.A.S.S. gate on Hi-Hog's adjustable alley spreaders to create a fully adjustable alley section that can be adjusted from 32" down to 18" in width.

These items use the same common connectors as our system panels. You can combine them freely to solve a wide range of design challenges.

- P.A.S.S. Gate - #85, 123 lbs
- P.A.S.S. Panel - #86, 95 lbs



PASS Gate, #85




PASS Panel, #86

### SORTING ALLEY SECTION

Hi-Hog offers a variety of 7' sheeted system panels that can be used in the same manner as the P.A.S.S. panel and P.A.S.S. gate. Hang these items on our adjustable alley spreaders to create a 7' long alley section that you can sort/divert animals through.

- #1370, 7' Sheeted panel with access gate and sort gate  
80" high frame, 66" high gates, 226 lbs
- #1375, 7' Sheeted panel with large gate  
80" high frame, 66" high gate, 209 lbs
- #1380, 7' Sheeted panel with small sort gate  
80" high frame, 66" high gate, 207 lbs
- #250, 7' Sheeted panel - 66" high panel, 146 lbs
- #251, 7' Sheeted panel - 60" high panel, 128 lbs

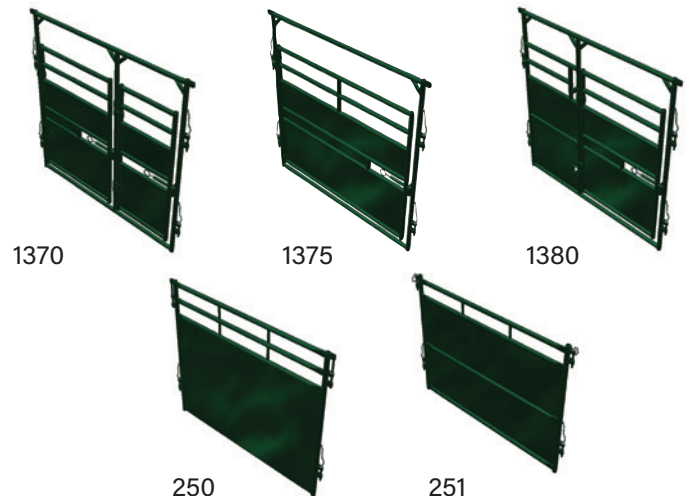

## CATTLE CROWDING TUBS


We have over 75 crowding tub, bud box, and flight bulb designs. The following are the most common.

### Funnel Tub: half circle tub with funnel extension

	Size of Tub*			Item Description	#	Lbs
	1/6	1/3	1/2			
Pcs Required	1	2	3	10' Curved Tub Section	230	209
	1	2	3	Overhead Tub Spreader	270	46
	1	1	1	Tub Pivot Gate	280	435
	1	1	1	7' Straight Panel with Double Gates	1370	226
	1	1	1	S-Alley B-Section - 66" high	1340	216

Tub size based on portion of a full circle. A 3-section tub will make 1/2 of a circle


The funnel section can be created with either the 7' load-out panel (#1370 shown), or a straight panel with a single gate (#1380), or simply a 7' straight panel (#250).

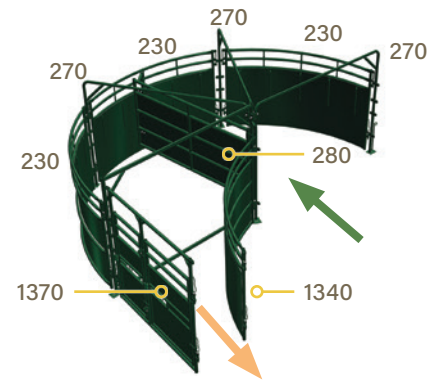

### Half circle tub with 250 extension

	Size of Tub*			Item Description	#	Lbs
	1/6	1/3	1/2			
Pcs Required	1	2	3	10' Curved Tub Section	230	209
	1	2	3	Overhead Tub Spreader	270	46
	1	1	1	Tub Pivot Gate	280	435
	1	1	1	7' Straight Panel	250	146


Tub size based on portion of a full circle. A 3-section tub will make 1/2 of a circle

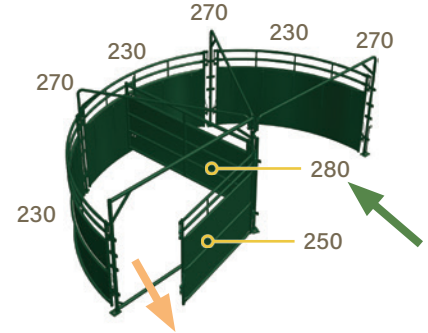

### Half circle tub with 240 Extension


	Size of Tub*			Item Description	#	Lbs
	1/6	1/3	1/2			
Pcs Required	1	2	3	10' Curved Tub Section	230	209
	1	2	3	Overhead Tub Spreader	270	46
	1	1	1	Tub Pivot Gate	280	435
	1	1	1	9'-3" Straight Alley Panel	240	194

Tub size based on portion of a full circle. A 3-section tub will make 1/2 of a circle

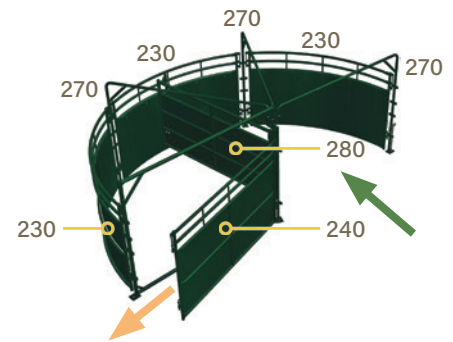


### Return Tub - Tub based on a Bud Box

Pcs	Item Description	#	Lbs
4	10' Curved Tub Section	230	209
4	Overhead Tub Spreader	270	46
1	Tub Pivot Gate	280	435
1	6' High U-Frame	310-6	209
1	5' High x 8' Long Heavy Duty Gate with plunger latch	6651	105

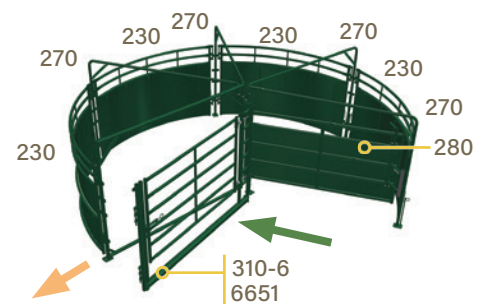

### 1/3 circle tub with reverse flow

Pcs	Item Description	#	Lbs
2	10' Curved Tub Section	230	209
2	Overhead Tub Spreader	270	46
1	Tub Pivot Gate	280	435
1	9'-3" Straight Alley Panel	240	194

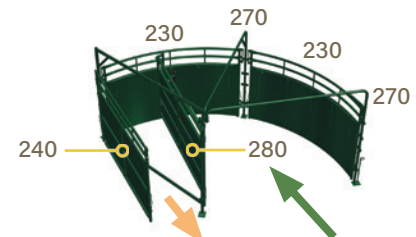

NOTE: A #235 walkway can be hung on the outside of a curved tub panel. #230

NOTE: The Overhead Tub Spreader and Pivot Gate come with a ground stake. To prevent your livestock from re-aligning your tub components we recommend you stake your tub to the ground. The ground stakes can also be ordered separately as Item #271

Further explanation, samples and installation instructions can be found at [www.hi-hog.com](http://www.hi-hog.com)

### Non-Adjustable 32" Alley Parts

### Adjustable U-Alley Parts

### Adjustable Combi

66" high Panel

#85 4'6" PASS Gate 123 lbs	#86 4'6" PASS Panel 95 lbs	#1440* 10' Curved Section 195 lbs	#1380 7' Alley Sort Gate 207 lbs	#240 9' 3" Alley Panel 194 lbs
----------------------------------	----------------------------------	---	--	--------------------------------------

#1401! 9' U-Alley Section 168 lbs	<b>Note:</b> Item #1401! will only connect to the outside of the U-Alley spreaders, or U-to-S Alley spreaders.	#250 7' Sheeted Alley Panel 146 lbs
---	--	---




These panels hang on wheels rather than the standard connectors found on all of the remaining Hi-Hog system panels.

60" high Panel

#1402* 7'6" U-Alley A1 Section 151 lbs	#251 7' Alley Panel 128 lbs	#241 9' 3" Alley Panel 177 lbs
--	-----------------------------------	--------------------------------------

#1402* 7'6" U-Alley A1 Section 151 lbs	#251 7' Alley Panel 128 lbs
--	-----------------------------------

Plan View

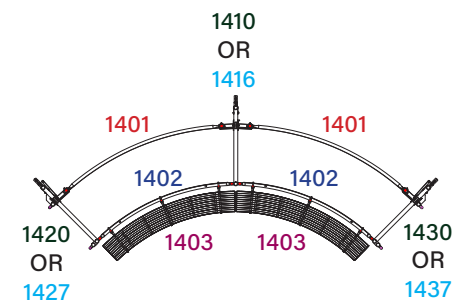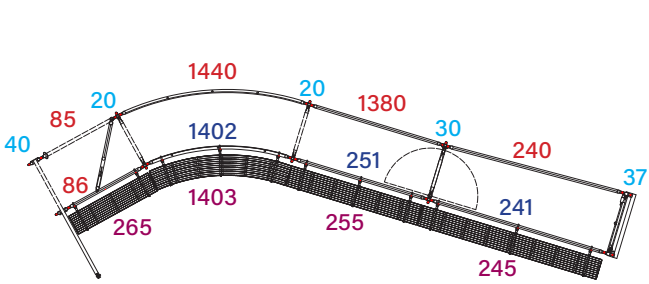

Walkways

#265* 4' Walkway 51 lbs	#1403 7'6" A1 Walkway 80 lbs	#255 7' Walkway 80 lbs	#245 9'3" Walkway 94 lbs
-------------------------------	------------------------------------	------------------------------	--------------------------------

#1403 7'6" A1 Walkway 80 lbs	#255 7' Walkway 80 lbs
------------------------------------	------------------------------

Spreader Frames

\* Denotes Non-Stock Items

#30 32" Alley Spreader Non-Adjustable with Swing Door 78 lbs	#20 32" Alley Spreader Non-Adjustable 41 lbs
--	--

#1420* Adj. U-Alley Spreader Right Hand 217 lbs	#1410* Adj. U-Alley Spreader Interior 174 lbs	#1430* Adj. U-Alley Spreader Left Hand 217 lbs	#210 Adj. S-Alley Spreader Right Hand 185 lbs	#1425* Adj. U-to-S Alley Spreader Right Hand 148 lbs
---	---	--	---	--

Spreaders with Door

**NEW**

#40 32" Alley Spreader Non-Adjustable With Rolling Door 177 lbs	#45 32" Alley Spreader Non-Adjustable Bi-Fold Alley Gate 292 lbs	#37* 36" Alley Spreader Non-Adjustable with Lift-up Gate 110 lbs
---	--	--









#1427* Adj. U-Alley Spreader, Right with Rolling Door 338 lbs	#1416* Adj. U-Alley Spreader, Interior with Rolling Door 420 lbs	#1437* Adj. U-Alley Spreader, Left with Rolling Door 338 lbs	#215 Adj. S-Alley Spreader, Right with Rolling Door 299 lbs	#1426* Adj. U-to-S Alley Spreader, Right with Rolling Door 388 lbs
---	--	--	---	--


**Station Alley Parts**

**Adjustable S-Alley Parts**

**Alternate Alley Parts**

<p><b>#1401!</b> 9' U-Alley Section 168 lbs</p> 	<p><b>#240</b> 9'-3" Alley Panel 194 lbs</p> 	<p><b>#180</b> 10' S-Alley A Section 199 lbs</p> 	<p><b>#1340</b> 10' S-Alley B Section 216 lbs</p> 
<p><b>#1402*</b> 7'-6" U-Alley A1 Section 151 lbs</p> 	<p><b>#241</b> 9'-3" Alley Panel 177 lbs</p> 	<p><b>#190</b> 10' S-Alley A1 Section 197 lbs</p> 	<p><b>#1350</b> 10' S-Alley B1 Section 181 lbs</p> 



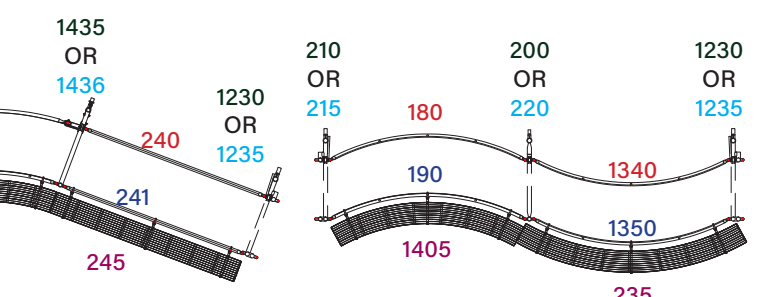

<p><b>#1342</b> 7'6" S-Alley B Section 165 lbs</p> 	<p><b>#1375</b> 7' Alley Frame w Gate 209 lbs</p> 	<p><b>#181*</b> 12' S-Alley A Section 238 lbs</p> 	<p><b>#1341*</b> 12' S-Alley B Section 258 lbs</p> 
<p><b>#1352</b> 7'6" S-Alley B1 Section 139 lbs</p> 	<p><b>#239*</b> 1'6" x 5' 6" high Sheeted Alley Panel 40 lbs</p> 	<p><b>#243</b> 9'2" x 4' high Calf Alley Panel 129 lbs</p> 	<p><b>#244</b> 9'2" x 80" high Calf Alley Panel 152 lbs</p> 








### ROLLING DOOR











Hi-Hog's fixed width, 32" wide rolling door is an extremely versatile option for any working alley. The door locks automatically when closed, but can be released and opened quickly and easily from either side of the alley. Item #40, 177 lbs.




<p><b>#1403</b> 7'6" A1 Walkway 80 lbs</p> 	<p><b>#245</b> 9'3" Walkway 94 lbs</p> 	<p><b>#1405</b> 10' A1 Walkway 94 lbs</p> 	<p><b>#235</b> 10' B1 Walkway 105 lbs</p> 
---	--	---	---

<p><b>#275</b> Walkway Transition 9.5 lbs</p> 	<p><b>#1406</b> Walkway Stairs 31 lbs</p> 	<p><b>#2285*</b> Bison Scale Platform 475 lbs <i>*Special Order</i></p> 
---	---	---

<p><b>#1435*</b> Adj. U-to-S Alley Spreader Left Hand 148 lbs</p> 	<p><b>#1230</b> Adj. S-Alley Spreader Left Hand 185 lbs</p> 	<p><b>#210</b> Adj. S-Alley Spreader Right Hand 185 lbs</p> 	<p><b>#200</b> Adj. S-Alley Spreader Interior 117 lbs</p> 	<p><b>#1230</b> Adj. S-Alley Spreader Left Hand 185 lbs</p> 
--	---	---	---	---

<p><b>#3350*</b> 24" Steer-Alley Spreader Non-Adjustable Primarily for rodeo use 38 lbs</p> 	<p><b>#3330*</b> 18" Calf-Alley Spreader Non-Adjustable 29 lbs</p> 	<p><b>#170</b> Adjustable Alley Stop 45 lbs</p> 
---	--	---

<p><b>#1436*</b> Adj. U-to-S Alley Spreader, Left w Rolling Door 388 lbs</p> 	<p><b>#1235</b> Ad S-Alley Spreader, Left w Rolling Door 307 lbs</p> 	<p><b>#215</b> Adj. S-Alley Spreader, Right with Rolling Door 299 lbs</p> 	<p><b>#220</b> Adj. S-Alley Spreader, Interior with Rolling Door 366 lbs</p> 	<p><b>#1235</b> Adj S-Alley Spreader, Left with Rolling Door 307 lbs</p> 
---	--	---	--	--

<p><b>#3360*</b> 24" Steer-Alley Spreader Non-Adjustable with Gate Primarily for rodeo use 71 lbs</p> 	<p><b>#59</b> 18" Calf-Alley Spreader, Non-Adjustable with Lift Gate 47 lbs</p> 	<p><b>#60</b> 18" Calf-Alley Spreader, Non-Adjustable with Side Tilt Gate 56 lbs</p> 
---	---	--

## CATTLE WORKING ALLEYS


If you would like help developing a design for your cattle facility, call toll-free 1-800-661-7002. One of our experienced designers can prepare a complimentary scaled and itemized CAD drawing for you.

### ADJUSTABLE S-ALLEYS

Curved system panels are connected to adjustable S-Alley spreaders to create an alley whose width can be adjusted from 32" down to 18". While the S-Alley is created with curved panels, the alley spreaders are positioned on a straight line.

The alley section made with items #180 and #190 is called an **A-section**, while the alley section created with items #1340 and #1350 is referred to as a **B-section**. The three section alley shown below is described as an **A-B-A** alley. A three section alley can also be made to be a **B-A-B** alley (see smaller drawing, below right).

Each of the adjustable S-Alley Spreaders are also available with a sheeted rolling door. Optional walkways and an alley stop are also available. The first section of S-Alley is 11' long. Each additional S-Alley section adds another 10'. The panel heights are either 60" or 66" high.

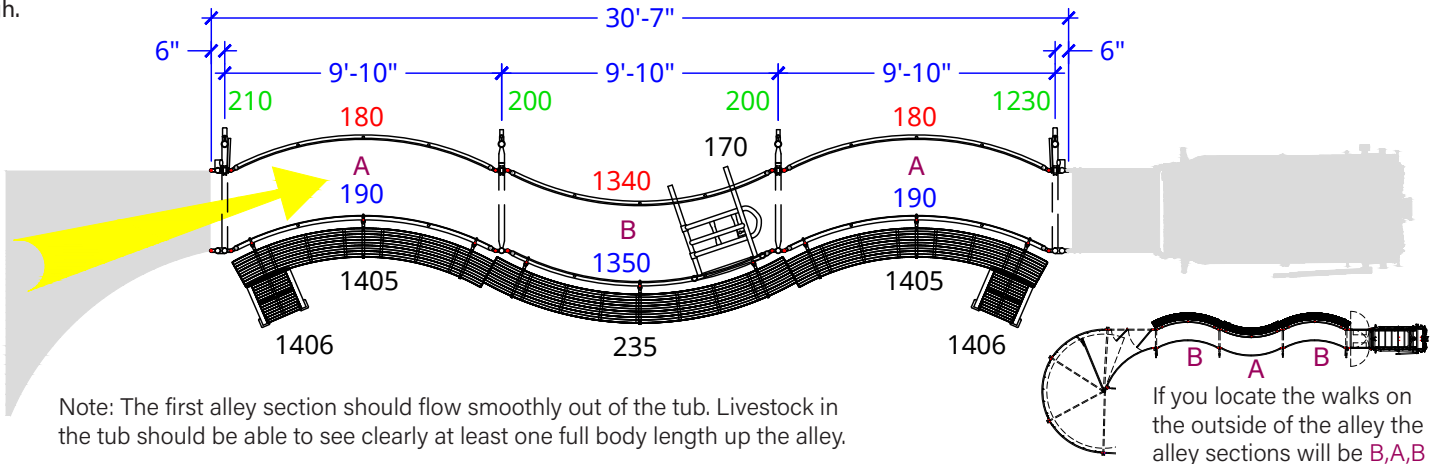

### ADJUSTABLE U-ALLEYS

The curve of the U-Alley encourages livestock flow.

Each U-Alley section covers 45° of a circle.

The inside curved panel (#1402) is 60" high. The outside curved panel (#1401) is 66" high.


The length of each alley section (measured on the center line of livestock travel) is approximately 9'.

This compact system is most often used where physical space is limited.

For best results, the U-Alley should be set-up on a firm, flat surface. For improved animal and handler footing, we recommend installing on grooved concrete or paddock slab.


All of the U-alley spreaders are available with or without rolling doors.

Walkways, walkway stairs, and alley stops are also available.

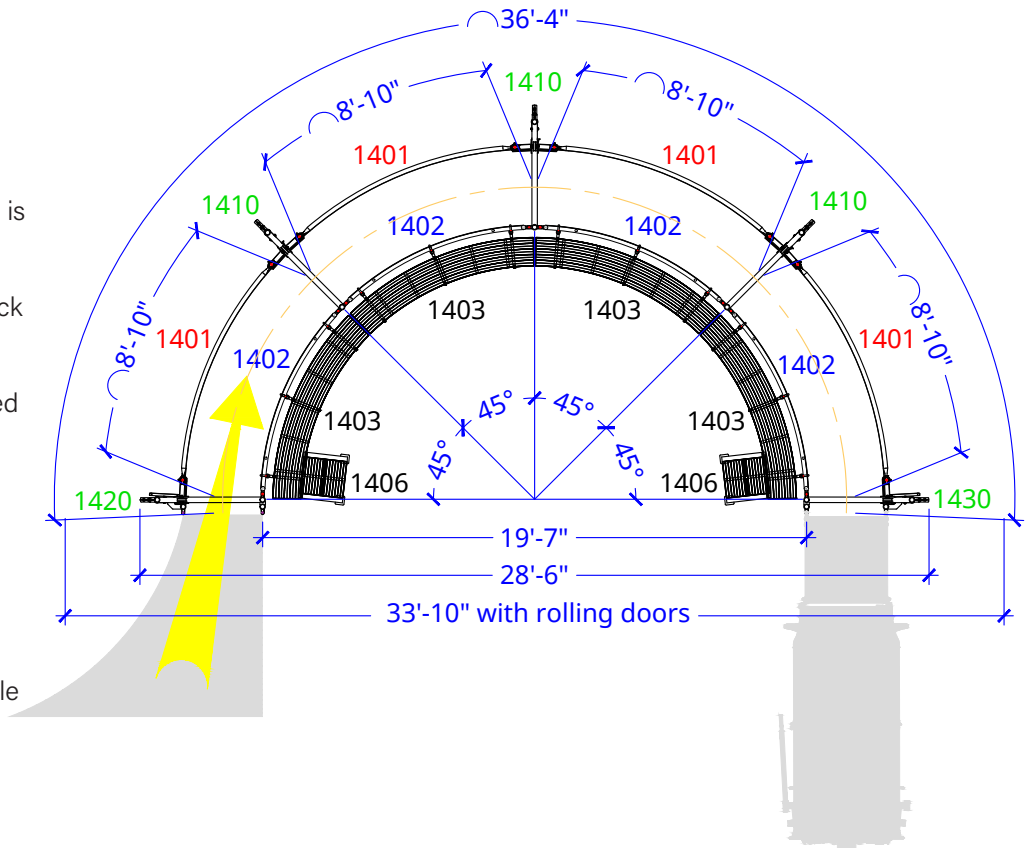


## COMBINATION ALLEYS

Hi-Hog offers a range of sheeted straight alley panels that can be combined with U-Alley components to create custom non-adjustable and adjustable combination alleys.

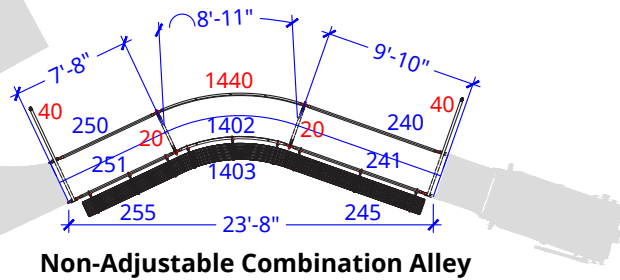

**Non-Adjustable Combination Alley**

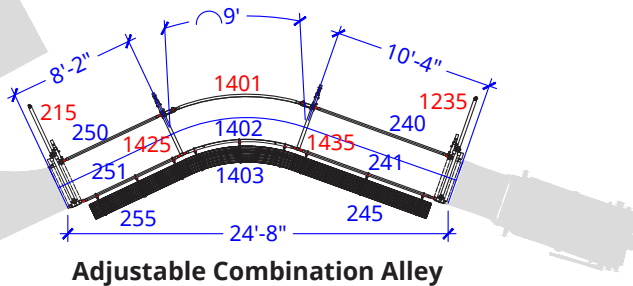

**Adjustable Combination Alley**

### Non-Adjustable Combination Alley

A number of our standard alley panels can be combined with our fixed width alley spreaders to create a fixed 32" wide working alley.

Curved sections are created using a 1402 on the inside of the alley and a 1440 on the outside of the alley. Each curved section will change the direction of livestock flow by 45 degrees. Straight sections can be made by using any of our sheeted straight panels (4', 7', or 9'-3" in length).

### Adjustable Combination Alley


Special transition spreaders (items #1425 and #1435) are used at the junction between straight and curved adjustable alley sections. These alley spreaders are also available with a rolling door (items #1426 and #1436, not shown).

The curved alley section should be installed on a firm, flat surface.

## DOUBLE ALLEYS



The sample double alleys shown here are loaded out of Return Boxes. Double alleys can however be easily loaded from a broad range of crowding tubs. For more information on Return Boxes and Crowding Tub options, visit the Crowding Tub section on the Hi-Hog website.

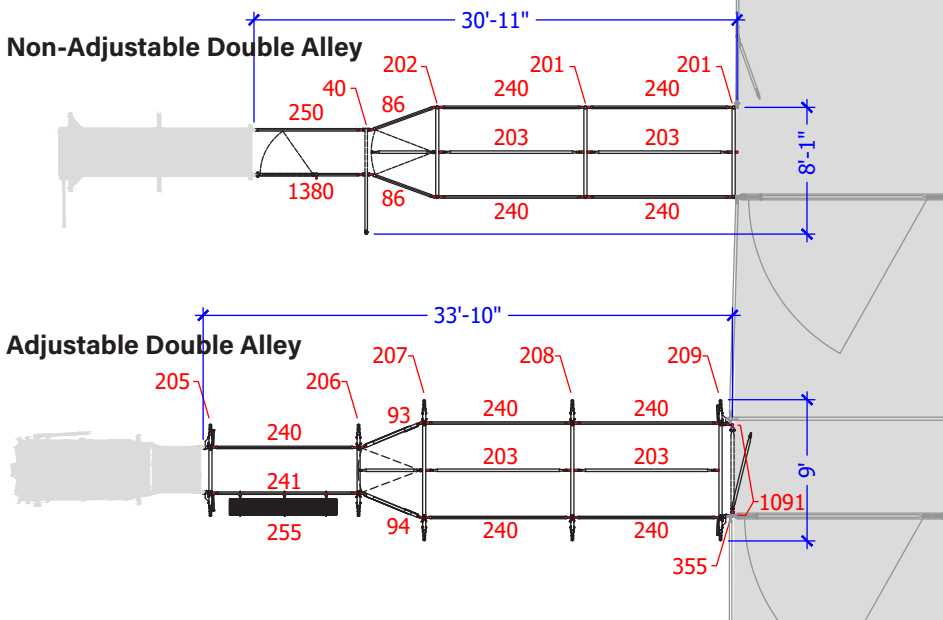


A double alley can speed up the time it takes to fill your working alley. Cattle travel through the alley with their herd. They are more willing to enter the alley and less stressed because they are not isolated.

Alley spreaders allow you to create either a fixed, or adjustable-width double alley.

The double alley offers a large opening so cattle can locate and enter the alley quickly using a #355 frame and gate as an alley barrier.

#	Description	Weight Lbs
201	Double Alley Spreader	106
202	Double Alley Spreader w Sort Gate	157
203	Double Alley - 6-Bar Open, 9'-3" Center Panel	108
240	9'-3' Sheeted Alley Panel	194
205	32" alley end spreader w twin controls	275
206	32" alley interior spreader w twin controls	164
207	Double Spreader w Sort Gate-Adj Width	261
208	Double Spreader-Interior-Adj Width	212
209	Double Spreader-End-Adj Width	313
86	P.A.S.S. Panel	95
93	Sheeted Expanding Panel - Right Hand	182
1091	6' - 3 - Way Connector Post	10.8
355	8' Frame w 6' Gate open bar Frame and Gate	155
94	Sheeted Expanding Panel - Left Hand	182

## HI-HOG S-ALLEY

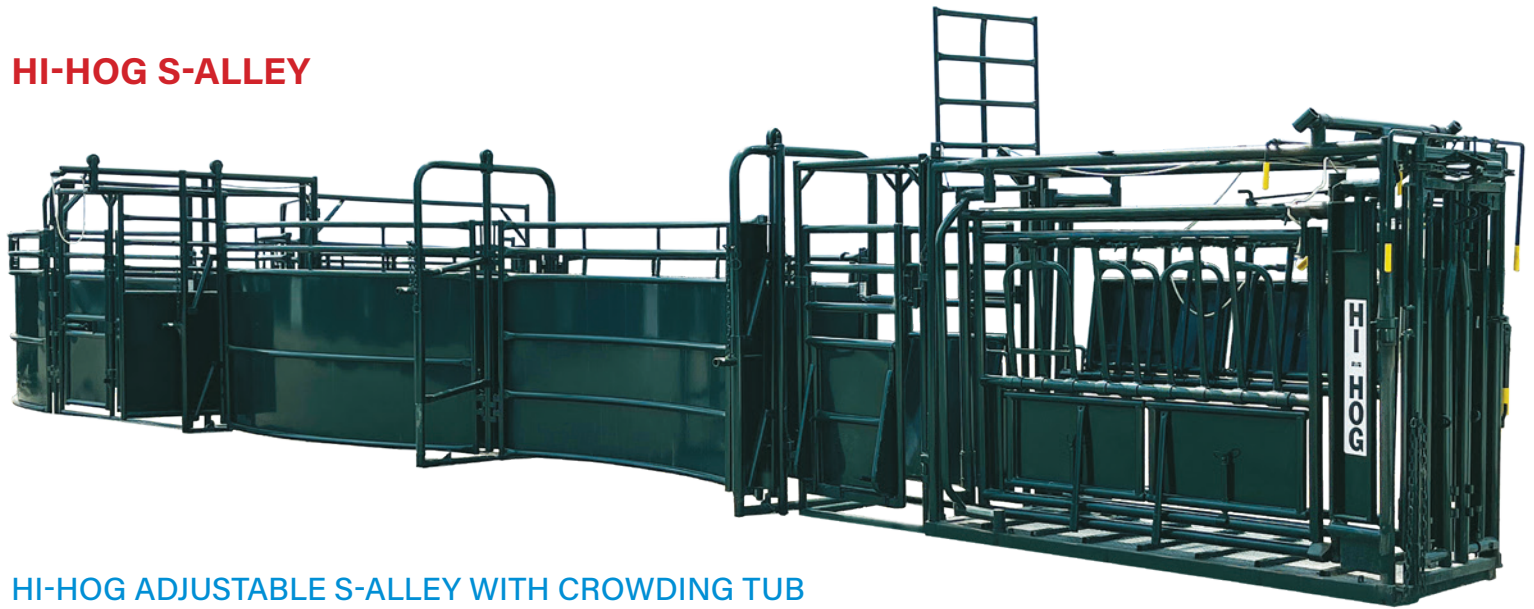

### HI-HOG ADJUSTABLE S-ALLEY WITH CROWDING TUB

The goal at Hi-Hog has always been to provide high quality handling equipment that is unmatched when it comes to livestock and rancher safety, while maximizing efficiency during handling. The Adjustable S-Alley with Crowding Tub is designed to streamline livestock handling processes. Ranchers can easily direct cattle from the Crowding Tub into the S-Alley, reducing the time and effort required for cattle movement. The Adjustable S-Alley is designed to accommodate various cattle sizes. This versatility is a significant advantage for ranchers dealing with different age groups or breeds. The equipment's adaptability ensures that it remains useful over time, even as the rancher's livestock mix changes. The Curved S-Alley was developed by Hi-Hog to take advantage of several natural livestock behaviors. The result is an alley that cattle will enter and flow through with less hesitation and less stress.

## HI-HOG DOUBLE ALLEY



### HI-HOG ADJUSTABLE DOUBLE ALLEY WITH A RETURN BOX

The primary advantage of the Hi-Hog Adjustable Double Alley with Return Box is its ability to facilitate rapid and controlled livestock movement. Ranchers can effortlessly direct cattle from the Return Box into the Adjustable Double Alley, making it easier to sort, load, or perform various husbandry tasks. This enhanced flow control saves time and effort in livestock handling. With an Adjustable Palpation Cage and Manual or Hydraulic Squeeze Chute with three way sorting, you can maintain a steady flow.


Hi-Hog understands that every ranching operation is unique. Our equipment uses a Common Connector System that is customizable to suit individual requirements. Whether ranchers need additional features or Load Outs, the Adjustable Double Alley with Sorting Box can be tailored to meet your needs and growth of your operation.






# PIN-TO-PIN DIMENSION GUIDE

This page displays the pin-to-pin measurements on Hi-Hog's system components. You can use these measurements to estimate how much room you might need for your handling system. Please note that there is some play in each of the pin connections. Your handling system may be slightly longer or shorter. For a more accurate estimate please contact our help desk and we can prepare a scaled drawing based on your individual system requirements. Stock item numbers are **RED**. Non-stock, special order item numbers are shown in **GREEN**.

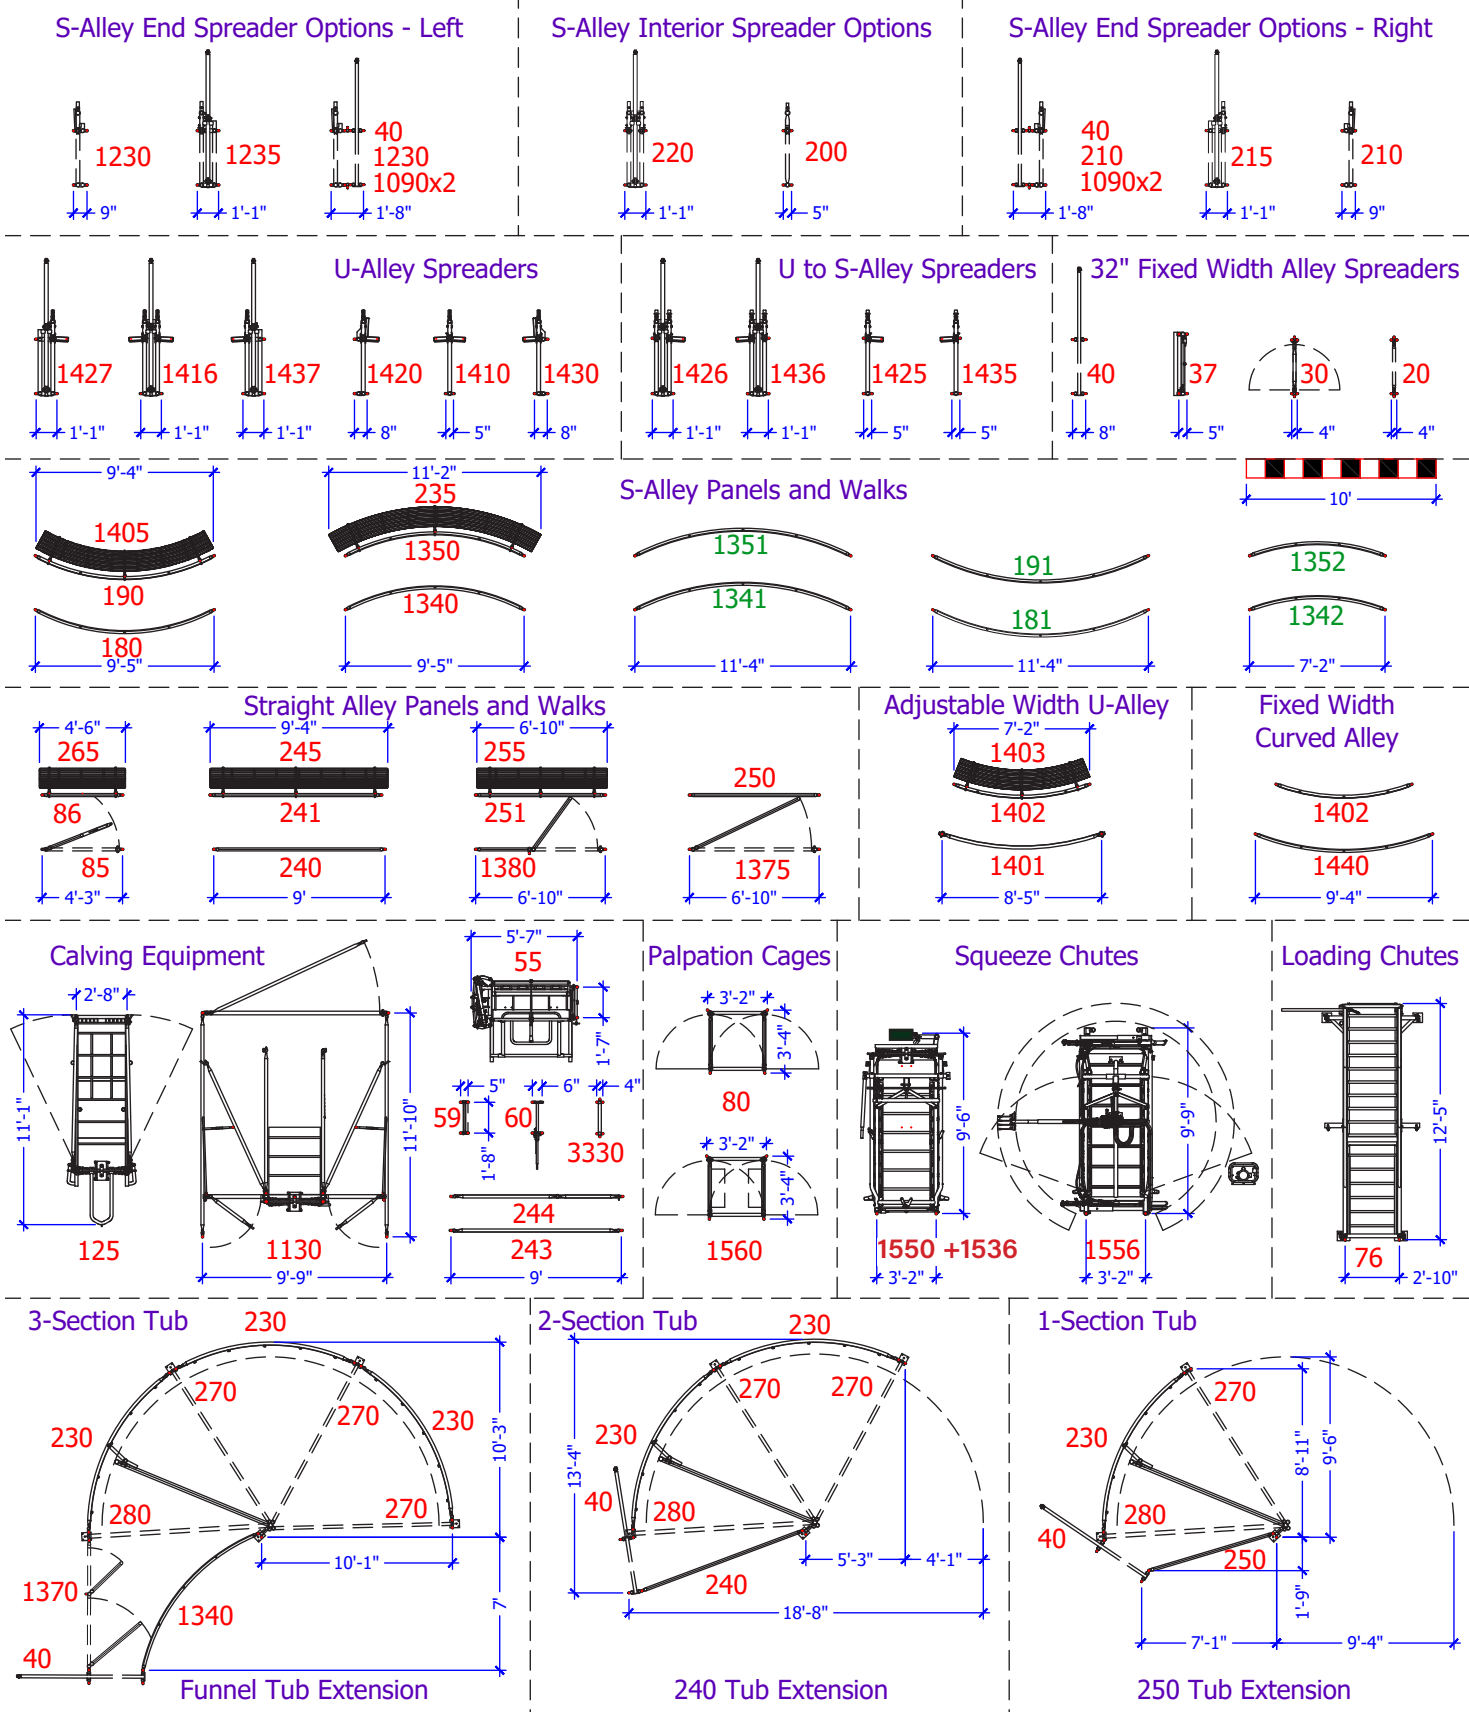


# Adjustable Livestock Loading Chutes

Stationary Loading Chute, Item #76

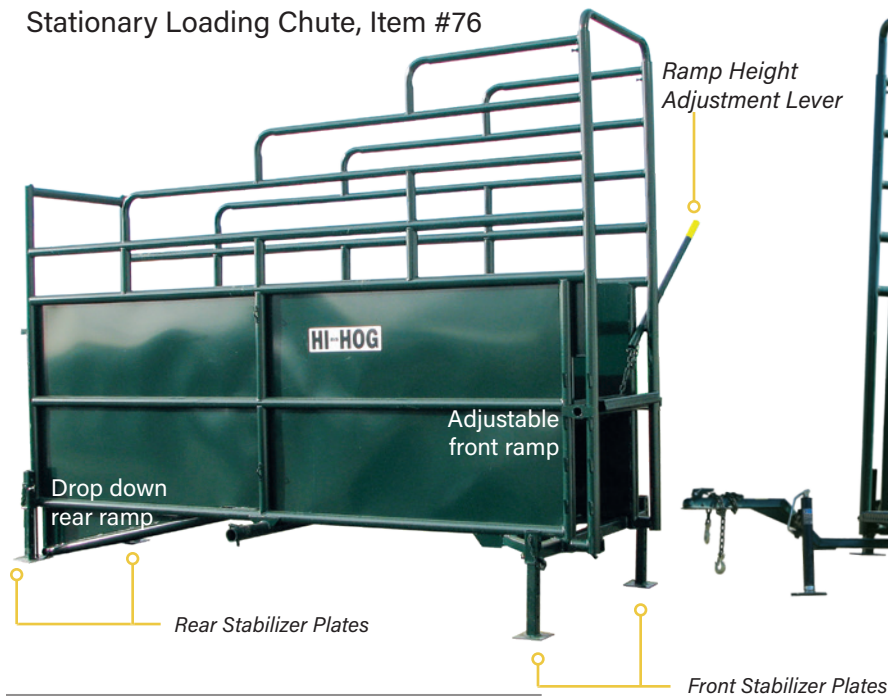

Portable Loading Chute, Item #75

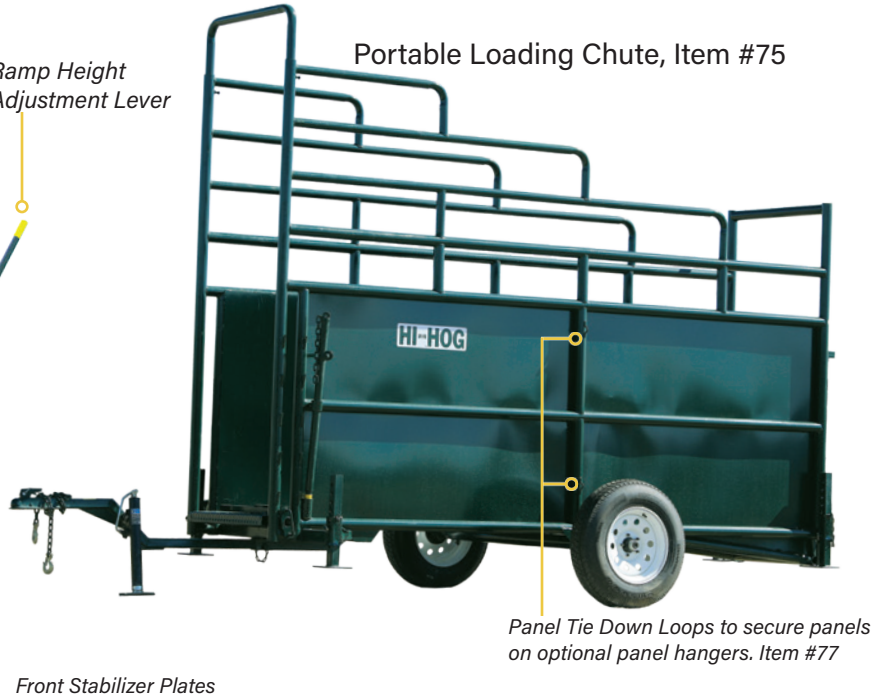

Note: The transport kit should be removed, and the loading chute secured in place, before loading or unloading livestock. ITEM #74



The overhead bow frame is shipped to our dealers in the lowered position (below Left). When you receive your loading chute, loosen the two set screws and raise the overhead bow frame to your desired height (below right).



Ramp height easily adjusts to provide loading heights from 16" to 48", using the adjustment lever.

The heavy duty, Checker Plate Loading Ramp quickly adjusts for secure loading from stock trailers to cattle liners.

The Loading Chute is lined with 48" high Hot Roll on the sides.

The Ramp is 1/8" Checker Plate with 1.25" square tubing, welded cleats on 9" centre. The Ramp Surface is finished with a high grip textured polyester powder coat finish.

4-Adjustable Stabilizer Legs are included to level the Loading Chute on any Surface.

The Bottom Ramp pivots down and rests on the rear stabilizer plates. The Top Ramp pivots up and latches at the height of the livestock trailer.

The Bottom Ramp adjusts easily with the assistance of an internal spring.

The optional Transport Kit (item #74) is available for ranchers that want to use the Loading Chute at multiple sites.

The Portable Loading Chute #75 comes with a 2,000 lb Screw Jack to assist with levelling the Loading Chute.

The rear verticals are equipped with Hi-Hog's standard Panel Connectors.

The axle capacity of this transport kit is 3,196 lbs.

Click on the 'QR' Code to visit the Loading Chute page of our website.



Universal Loading Chute		
#	Description	Weight (lbs)
74	Transport Kit	196
75	Portable Loading Chute	1594
76	Stationary Loading Chute	1398
77	Panel Hanger	12
Length with transport kit		16'-7"
Length without transport kit		12'-6"
Inside width of chute		32"
Shipping height		8'-5"
Shipping width at base		50"
Shipping width at chute body		36.5"

SINCE HI-HOG'S EARLY BEGINNINGS, BACK IN 1974, WE HAVE BEEN COLLABORATING WITH INDIVIDUALS AND ORGANIZATIONS TO DEVELOP PERSONALIZED DESIGNS.

COMPLETE RODEO SYSTEM / PENNING / BLEACHER SEATING - DESIGN AND FABRICATION



TRAINER CHALLENGE - RAMPS AND PLATFORMS - CUSTOM DESIGN AND FABRICATION



Hi-Hog designs and builds equipment for veterinary clinics, teaching facilities, livestock auction markets, zoos, wildlife reserve facilities, rodeo grounds, border inspection facilities, feedlots and more.

STOCKYARD / FEEDLOT - CUSTOM DESIGN AND FABRICATION







**1989**  
 It's Off to the Rodeo!  
 Hi-Hog begins building  
 Bucking Chutes and  
 Rodeo Systems. Our first  
 customers are Bashaw,  
 Kamloops, Calgary and  
 Medicine Hat!



**1967**  
 Albert and Ann Kneeshaw  
 started  
 Hi-Hog Pig Pens in a  
 backyard,  
 creating High Quality pig  
 pens and  
 horse enclosures.



**1994**  
 Hi-Hog Launches it's line of  
 Bison Handling Equipment.  
 Designed on the principles of  
 Batch Handling of Bison.  
 Unlike Cattle, Bison do not like  
 to be isolated. For this reason  
 you should never isolate your  
 bison unless you are going to  
 be moving them, or treating  
 them immediately.

**1974**  
 The Company continues  
 to improve it's brand  
 reputation coining  
 the phrase "Go High  
 Quality! Go Hi on the  
 Hog!"  
 Hi-Hog Farm &  
 Ranch Equipment is  
 incorporated.

**1990**  
 Hi-Hog moves into it's New  
 Manufacturing Plant in North  
 East Calgary. Tripling it's Shop  
 size.



**1999**  
 Hi-Hog Expands it's  
 Manufacturing Plant. in  
 North East Calgary.  
 Adding 4 welding bays a  
 dedicated machine shop,  
 and plenty of room to start  
 building Texas Gates and  
 Oilfield Equipment.







**2015**  
 Spruce Meadows,  
 Thunderbird Equestrian,  
 Calgary Stampede,  
 Pima County, AZ.  
 Across the Continent Hi-Hog  
 has built Equine Stalls for all  
 the big Event Centres.  
 Now we are back installing  
 our Custom stalls in the  
 Chuckwagon Barns in  
 Calgary.

**2022**  
 Hi-Hog is acquired by a new  
 family, whose story and  
 core values bared a striking  
 resemblance to those of the  
 Kneeshaw's. The Feigel family  
 (also three generations), from  
 Edmonton Alberta, and founders  
 of Universe Machine Corporation,  
 became the new shareholders of  
 Hi-Hog Farm & Ranch Equipment.  
 Hi-Hog is still the name for  
 Innovative products and  
 Dedicated Customer Service.

**2005**  
 Hi-Hog - "Building Custom  
 Designs with Standard  
 Components" - With  
 the latest CAD drafting  
 programs and it's common  
 connector system, Hi-Hog  
 builds a reputation for  
 giving Ranchers the most  
 options in the Market.

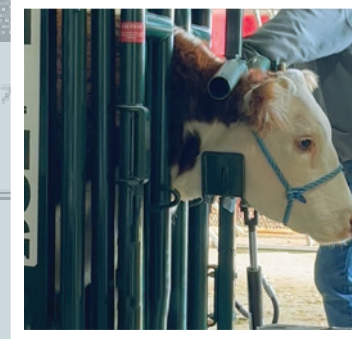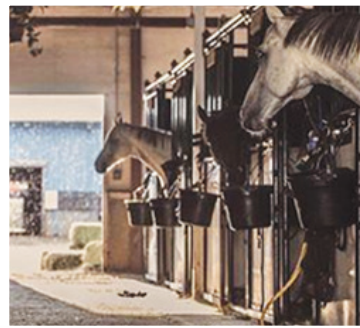


**2018**  
 Hi-Hog is off to Austria!  
 Building systems for the  
 expanding Bison market in  
 Europe.



**2024**  
 Committed to growth and  
 better serving our  
 marketplace Hi-Hog  
 is planning it's latest  
 expansion to allow for  
 Automation to build for the  
 future.

**2010**  
 Hi-Hog continues it's  
 growth into Custom  
 Facilities and Feedlots.

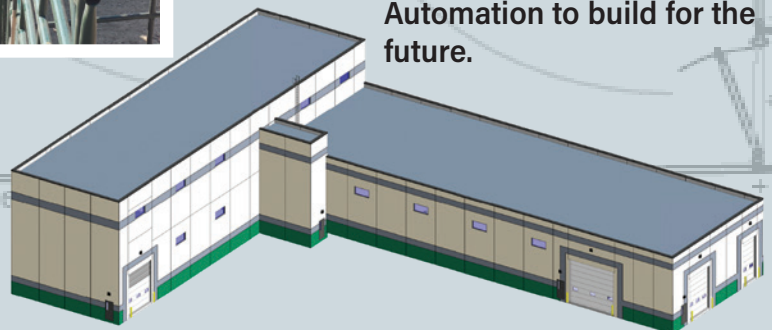







## STRENGTH OF MATERIAL:

Hi-Hog's portable event stalls are designed and constructed to provide horse shows and equestrian events with a superior temporary stall solution. The solid welded stall frames are made with 1.5" OD, 14 gauge, 60,000 psi high-tensile steel. The durable steel frames are given a scratch resistant, hunter-green polyester powder coat finish. The smooth, bright white, HDPE copolymer interior panels provide superior resistance to impact while remaining light weight and easy to clean. Hi-Hog's portable stall fronts and partitions are light enough for handling but heavy enough to endure the abuse of their occupants.

## EASE OF INSTALLATION:

Hi-Hog's portable horse stalls are easy to install. The fully assembled stall fronts and partitions simply pin together (no tools required). Partition panels come with three-way connectors on one end, and a single connector on the other end. So, whether you are setting up one stall or a large bank of back-to-back stalls, you will only need one three-way stall post. Large connectors allow for quick installation, even on uneven grades. The strong connectors resist bending to ensure they will still be easy to install after repeated assemblies.



See Page 52 for Dimensions  
Visit [www.hi-hog.com](http://www.hi-hog.com) for more

## DESIGN EXPERIENCE:

Stall Fronts include two sets of tie downs for adding feed & water accessories. The stall front gate is mounted on offset hinges on the center post to allow the gate to be opened flat against the stall face. The stall gate includes a simple, secure door latch. The top rail of the gate is extended towards the latch to remove a potential leg trap. Gate frames includes corner gussets for additional frame rigidity. An additional interior vertical provides superior strength and rigidity to the horizontal rails on both the stall front and stall partition. Tubing ends on the gate have been coned to provide a safe rounded finish. The top of the partition is filled with 16-gauge sheet metal. The sheet metal has been formed with ridges to add strength and reduce noise and vibration. A gap at the top of the partitions makes it easy for forklifts to handle and move the partitions.



80.5" Clearance



44" Outside Width

**CALVING / TRIMMING CHUTE**




64" Rear Height

108" Overall Length

Calving / Trimming Chute Item #125

**The Versatile Calving/Trimming Chute is popular with Ranchers, Veterinarian Clinics, 4-H'ers.**


- For calving heifers, grooming show cattle, or performing general veterinarian treatments.
- Full access to both sides of your animal. Split side panels provide control and access when and where you need it.
- The Upper and Lower Split Panels can latch together to form a single, solid side panel.
- Comes with Hi-Hog's rugged Self-Catch Headgate. The positive locking mechanism ensures that once the animal's head is secured, it cannot escape or move unpredictably, reducing the risk of injury to both cattle and handlers.
- Solid reinforced steel checker plate floor for superior durability, including traction bars for livestock stability
- Ratcheted stops in the floor make it easy to secure the side split panels.
- Secure the included heavy duty chain behind your cow to the opposite split panel to hold the Split Panels tight.
- The calving chute comes with connectors on all four corners of the chute so you can connect with any of Hi-Hog's panels, to make a calving Pen or Tub.

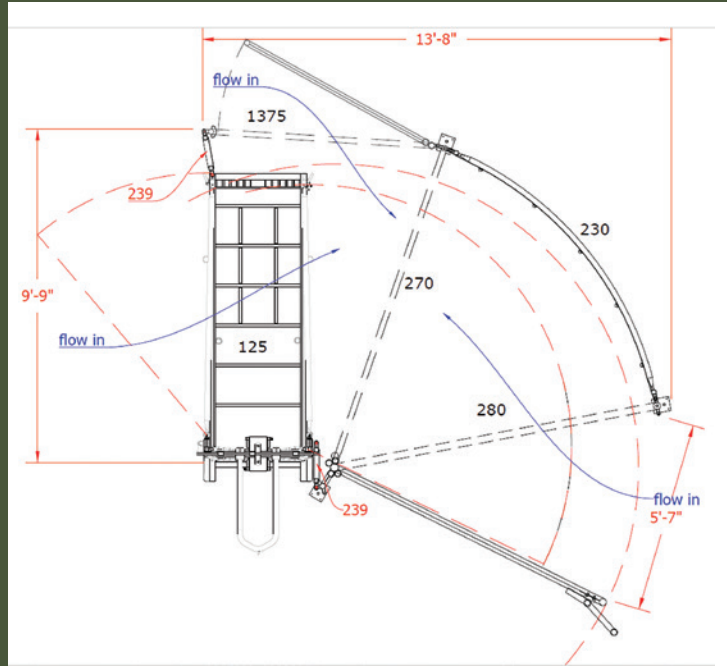

Calving/Trimming Chute

Description	#	Weight (lbs)
Calving/Trimming Chute	125	791
Head Tie-up Bar	126	16

## CALVING ENCLOSURE / MATERNITY PEN

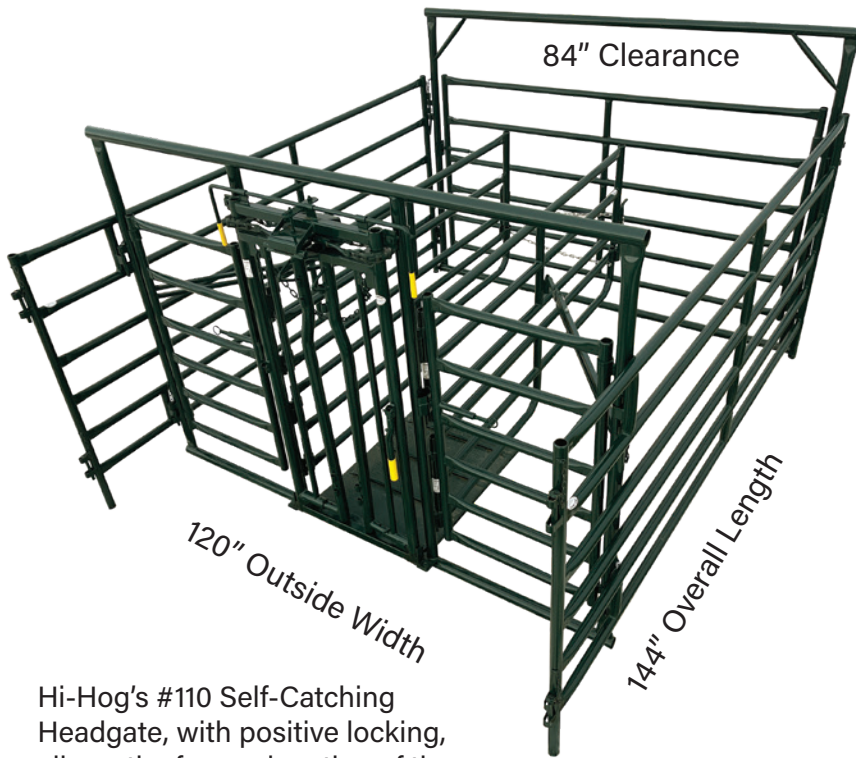

Hi-Hog's #110 Self-Catching Headgate, with positive locking, allows the forward motion of the cow to firmly catch and lock itself into the Enclosure.



Centred Self-Catch Headgate  
Complete Animal Access on Both Sides



Multiple Rear Split Panel Locking Options


Standard Calving Enclosure - complete, Item #1130 with optional #1146 Skid Platform

### Hi-Hog's Calving Enclosure with center mounted Self-Catch Headgate provides unmatched accessibility in a stable structure.

The self-catch headgate with adjustable stanchions is centered in the front panel of the calving enclosure to provide unmatched access to your cow. Ideal for milking out on one side while a calf sucks on the other side.

Access gates, on both sides of the headgate, come with self-locking plunger latches for quick and secure access. The pen comes with split side panels mounted to the front frame that can be swung to the sides to assist in catching the cow and providing a safe zone for the handler.

Folding braces allow you to position the split panels beside your cow and lock them securely. Two 1/4" x 48" chains with quick links are included to lock the Split Panels.

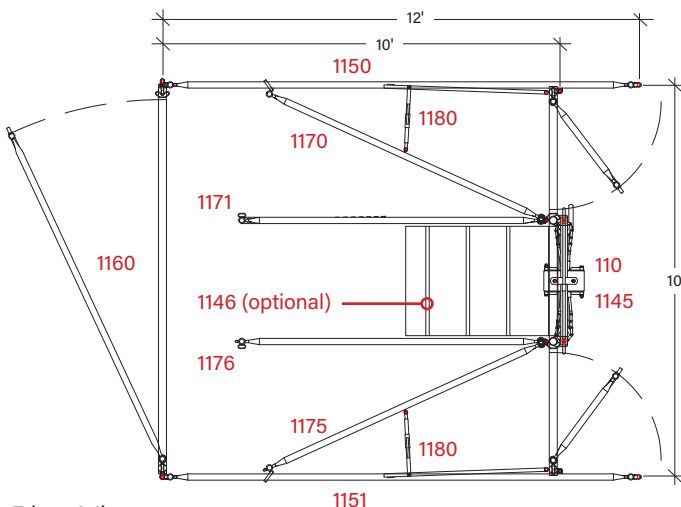


Plan View

#### Calving Enclosure

Description	#	Weight (lbs)
Standard Calving Enclosure (complete)	1130	1096
Self-Catch Calving Headgate	110	239
Front Enclosure Frame	1145	221
12' Left Side Panel	1150	112
12' Right Side Panel	1151	112
Split Panel - Top Left	1170	54
Split Panel - Top Right	1175	52
Split Panel - Bottom Left	1171	43
Split Panel - Bottom Right	1176	41
10'w x 7'h Calving Frame & Gate	1160	196
Folding Brace - 2 required	1180	15
Optional Skid Platform	1146*	72


# CALF ALLEY

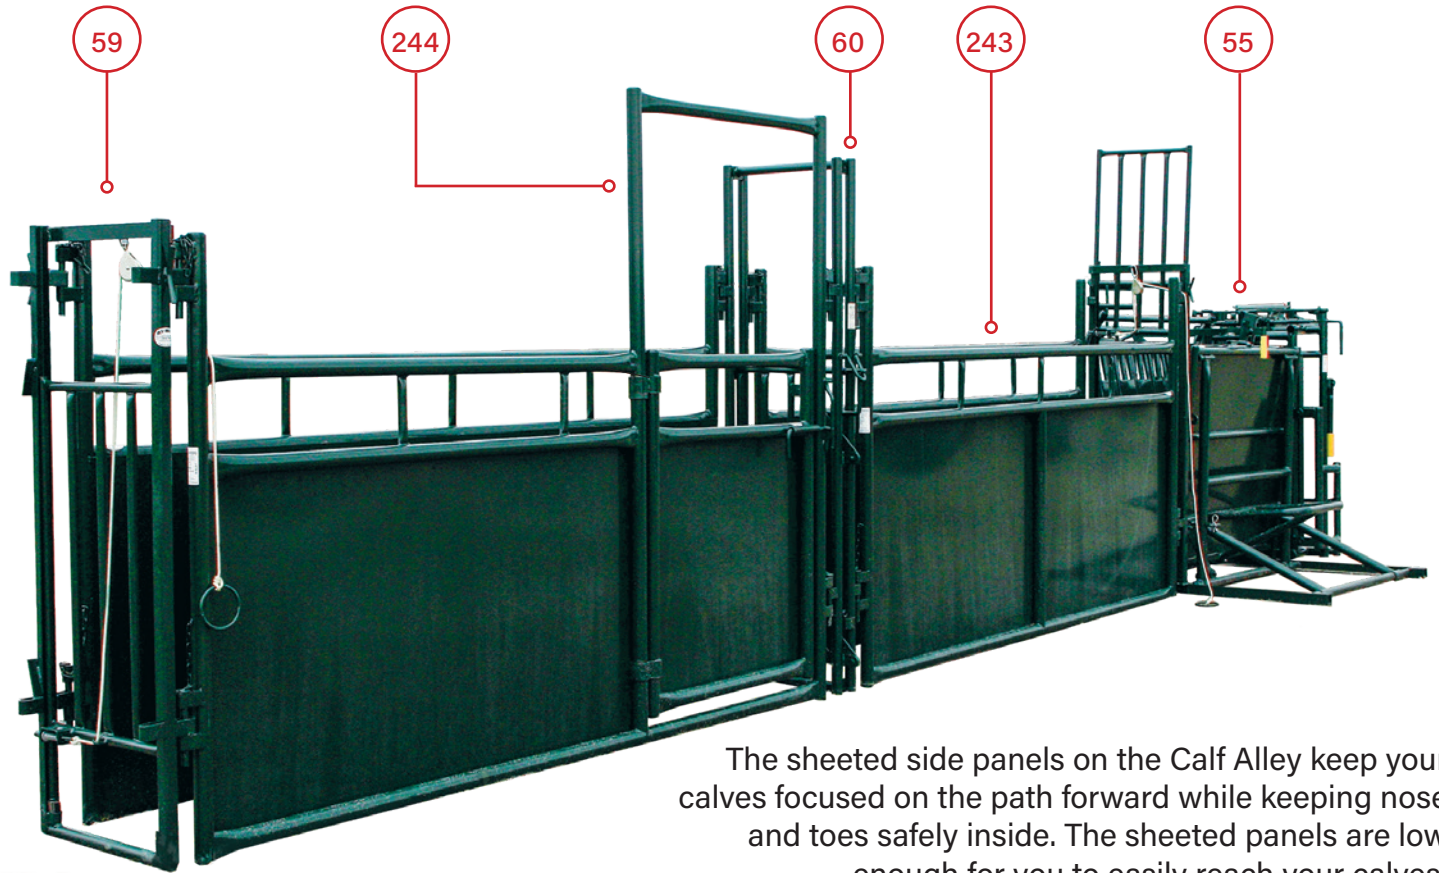

The sheeted side panels on the Calf Alley keep your calves focused on the path forward while keeping nose and toes safely inside. The sheeted panels are low enough for you to easily reach your calves.

## Calf Alley Spreader with Lift-up Gate, #59, 47 Lbs.


The lift-up gate in frame is operated by rope, allowing the handler to position themselves in the best location to effectively and efficiently move their stock. Connects with all Hi-Hog panels to make an 18" wide alley. Perfect for handling calves and small animals.

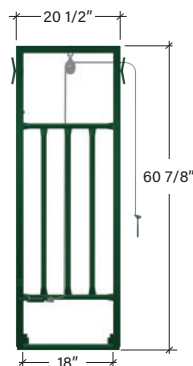

## Calf Alley Spreader with Side-tilt Gate, #60, 57 Lbs.


The side tilt calf alley gate locks in the closed position.

The additional interior clearance provided by this calf alley spreader makes it the preferred choice for those who work their calves from inside the alley.

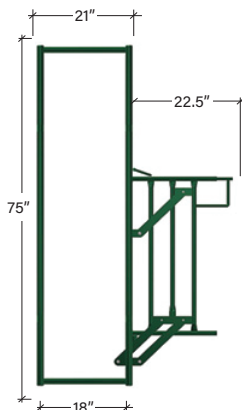


## Calf Alley Spreader - Plain, #3330, 29 Lbs.

Like the side-tilt gate, the plain calf alley spreader provides better clearance for those who wish to work their calves from inside the calf alley.

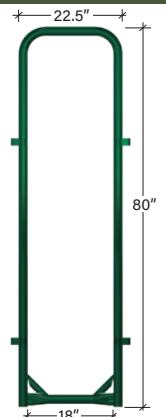


## Calf Alley Panel, #243, 129 Lbs.

The inside of the alley is finished with 16 gauge sheet metal to keep your calves focused on the path forward. The 48" height makes it easy to reach into the alley.

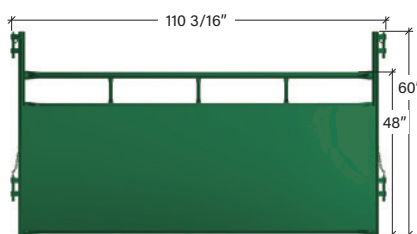

## Calf Alley Panel with Gate, #244, 153 Lbs.

Built the same as the calf alley panel (Item #243) but with an access gate for the handler. The access gate comes with a simple and secure gravity latch.

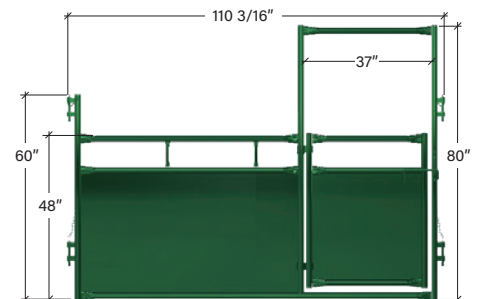

- Self-Catching, Positive Locking auto Headgate
- The Headgate opens wide for easy release
- Headgate can be locked open
- Headgate comes with neck extender for superior control
- Fully reversible for left or right hand brands
- Squeeze and tip in one easy well balanced motion
- Adjustable bottom width to hold a variety of weights and stock
- Pin the calf alley directly the tailgate which does not tip



## CALF TIPPING TABLE

- Six independent spring loaded side access panels swing down for safe, fast access to the full length of your animal
- Access panels are sheeted to keep feet safely inside
- Foot panel swings up to provide clear access to the feet (the foot panel is also removable)
- Equipped with convenient tie loops for securing legs
- Heavy duty all steel construction
- Quality fit and finish
- Table can be locked in upright position

Calf Tipping Table with Neck Extender Item # 55, 472 Lbs.

## Calf Sorting Gate

#382, 302 Lbs. Frame dimensions = 139 1/2" wide x 96" high



Hi-Hog's Calf Sorting Gate can help you sort your calves with a minimum of stress. The heavy-duty livestock gate can be used as a traditional pen gate throughout the year. When you're ready to sort your calves, you simply open the bottom half of the gate to allow your calves to flow through, with minimal stress.

The height of the gate is adjustable. This allows you to set the height of the gate opening to match the needs of your operation. Set the height of the opening to be just below the shoulder height of your calves. The gate has seven height settings.

## Calf Tipping Table

#55 + #58 Hydraulic Tip Kit, 509 Lbs.



## Hydraulic Tip Kit

#58, 37 Lbs.



An optional add-on Hydraulic Tipping Kit can be bolted directly to Hi-Hog's calf tipping table. (item #55).

Valve and Pump are not included.



## Paddock Slabs

Permeable design  
Erosion Prevention  
Environmental friendly  
Stable Interlocking design

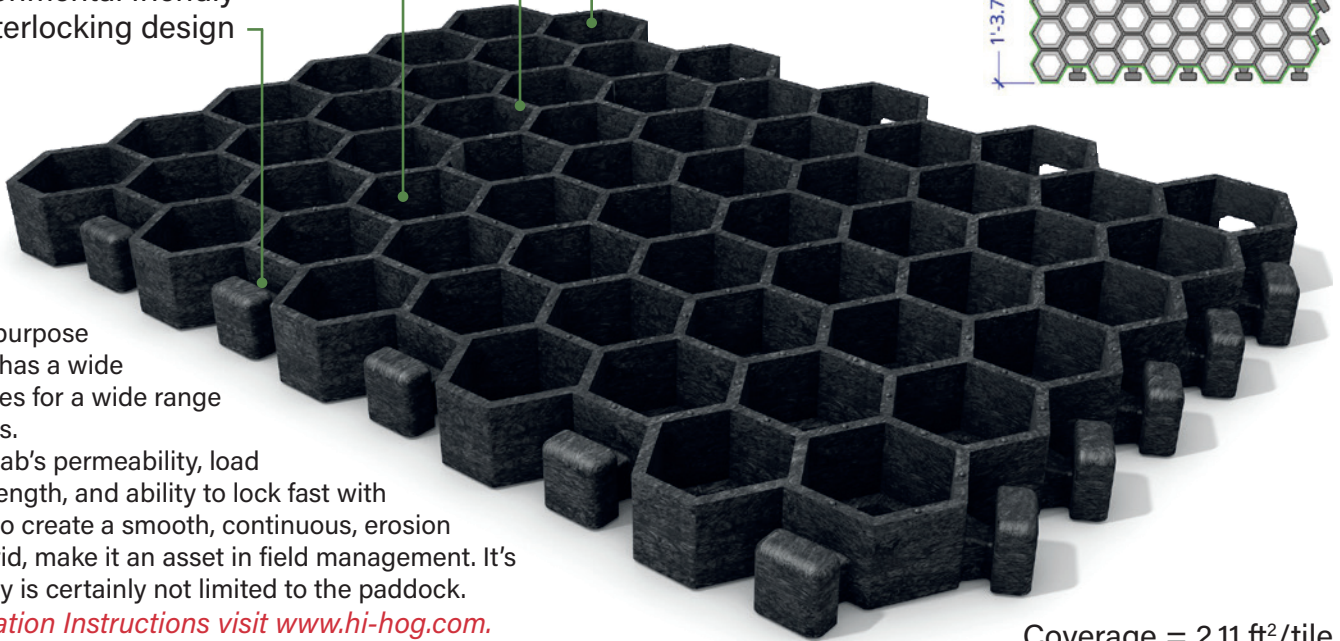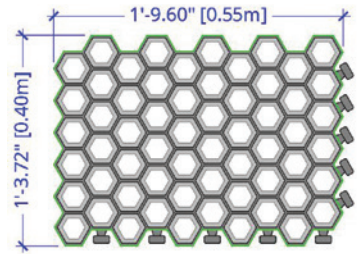

This multi-purpose porous tile has a wide range of uses for a wide range of industries.

Paddock Slab's permeability, load bearing strength, and ability to lock fast with other tiles to create a smooth, continuous, erosion resistant grid, make it an asset in field management. It's functionality is certainly not limited to the paddock.

*For Installation Instructions visit [www.hi-hog.com](http://www.hi-hog.com).*

*Made in Germany, Engineered for SLW 60 , 60t load (heavy goods vehicle).*

Coverage = 2.11 ft<sup>2</sup>/tile  
0.1957 m<sup>2</sup>/tile


### Arena Footing Base



### Erosion and Mud Protection



### Handling System Footing

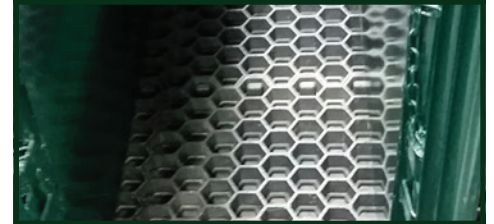

## BULL TIPPING TABLE

Item #95 - 2600 Lbs


Hi-Hog's Hydraulic Bull Tipping Table is a valuable tool. Primarily used for bovine hoof treatment and hoof trimming.

The table is also used for examining and treating injuries and problems with a bull's genitals or a cow's udders.

The animal walks through the open area between the padding. Once in position the animal is restricted and calms down and can be tilted with the Hydraulic Controls.

*\*The #95 Bull Tipping Table is a Special Order Item*


### HANDY PANELS:

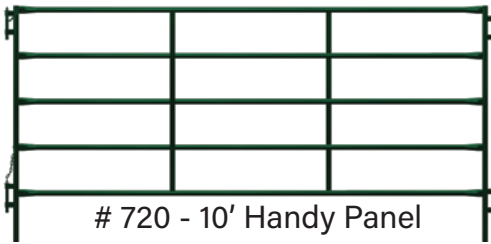

# 720 - 10' Handy Panel

- Designed to be used wherever you need a barrier.
- Light weight and Portable with our standard Pin and Chain common connections.
- Ideal for low pressure animal segregation and Wellhead Protection.
- Handy Panels are constructed with 1-5/16" - 16 gauge High Tensile North American Steel Tubing, with 3/16" flat interior vertical supports.
- Durable Polyester Powder Coat Paint finish.


### CORRAL PANELS:

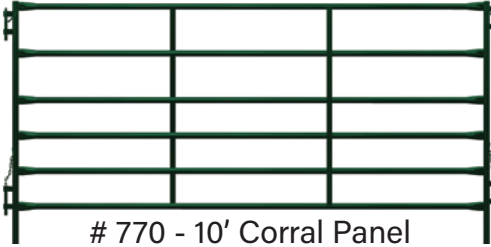

# 770 - 10' Corral Panel

- Designed for use in Holding Corrals
- The Narrow Spacing on the four bottom bars provides added Calf control. Suited for Equine and non-alley Cattle Corrals.
- Corral Panels are constructed with 1-1/2" - 16 gauge High Tensile North American Steel Tubing, with 3/16" flat interior vertical supports.
- Durable Polyester Powder Coat Paint Finish.
- Available in 5' and 6' heights.

### HEAVY DUTY PANELS:

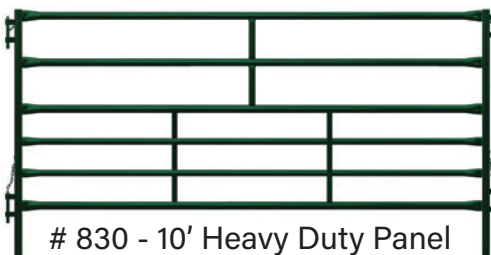

# 830 - 10' Heavy Duty Panel

- Designed for use in High Pressure Areas, such as Working Corrals and Handling Facilities.
- Narrow Spacing on the four bottom bars for Calf control.
- Heavy Duty Panels are constructed with 1.9" - 14 gauge and 1-1/2" 16 gauge High Tensile N. A. Steel Tubing and steel tubing interior supports.
- Heavy Duty panels are available in 5', 6' and 7' heights.
- All Hi-Hog Panels have a Durable Powder Coat Paint Finish.


### HANDY GATES:



# 530 - 10' Handy Gate

- Designed for low pressure uses such as acreage gates or in tandem with Hi-Hog Cattle Guards.
  - Handy Gates are constructed with 1-1/2" - 16 gauge High Tensile North American Steel Tubing. Coned verticals remove sharp edges.
  - Horizontals are reinforced with 1.25" x 3/16" flat bar.
  - Handy Gates have two 13" x 3/4" All-thread hinges.
- 16', 18' and 20' handy gates come with 13" x 1" All-thread 1.9" dia., hinge collars.


### CORRAL GATES:

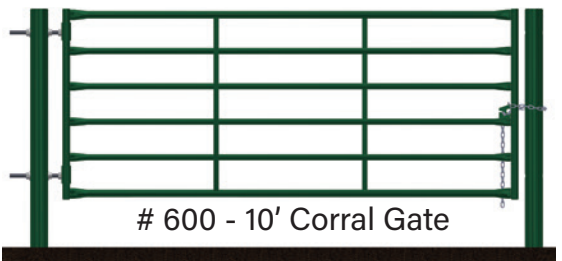

# 600 - 10' Corral Gate

- Designed for moderate pressure uses such as corrals.
- The top, bottom, and end verticals are constructed of 1.9" OD, 14 gauge tubing. Interior horizontals are constructed of 1.5" OD, 16 gauge tubing. Coned Verticals remove sharp edges.
- Reinforced with 1.25" x 3/16" flat bar. Corral Gates have two 13" x 1" All-thread hinges.
- All gates includes 48" of 1/4" zinc plated chain and a no-slip chain latch.


### HEAVY DUTY GATES:

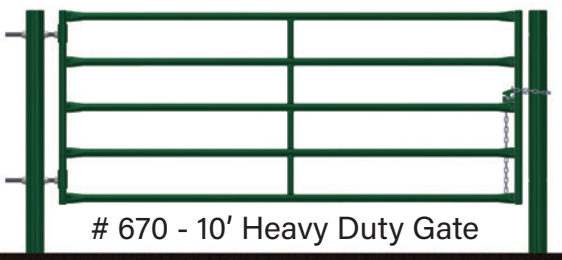


# 670 - 10' Heavy Duty Gate

- Heavy Duty Gates are primarily used in livestock handling applications.
- Constructed of 1.9" OD 14 gauge High Tensile North American Steel Tubing. Coned Verticals remove sharp edges.
- Reinforced with 1 1/2" OD 16 gauge tubing. Coped to fit the horizontals.
- Heavy Duty Gates comes with two 13" x 1" All-thread hinges on four inch collars. 48" of 1/4" zinc plated chain and a no-slip chain latch.
- Available in 4', 5' and 6' heights.
- All Hi-Hog Gates have a Durable "Hi-Hog Green" Powder Coat Finish.


# PANELS

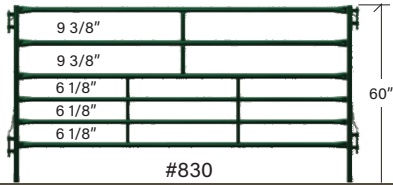

5' High Heavy Duty Panel - 6 Bar		
Length	#	Weight (lbs)
4'	808*	49
6'	810	69
8'	820	87
10'	830	104
12'	840	124
14'	850	141
16'	860	161

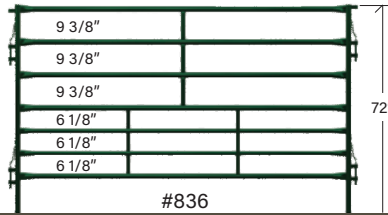


6' High Heavy Duty Panel - 7 Bar		
Length	#	Weight (lbs)
4'	809*	58
6'	816	82
8'	826	103
10'	836	124
12'	846	147
14'	856	168
16'	866	192

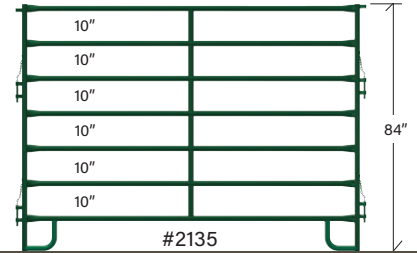


7' High Heavy Duty Panel - 7 Bar		
Length	#	Weight (lbs)
4'	2105 *	70
6'	2115 *	93
8'	2125	124
10'	2135	147
12'	2145	178
14'	2155 *	200
16'	2165	223

\* Denotes a non-stock item

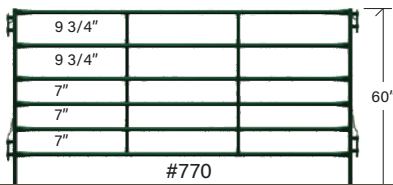

5' High Corral Panel - 6 Bar		
Length	#	Weight (lbs)
6'	750	51
8'	760	66
10'	770	78
12'	780	93
14'	790	105
16'	800	120

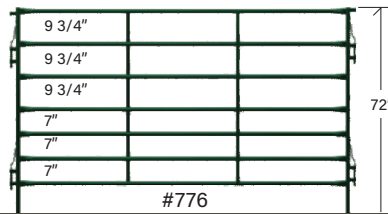

6' High Corral Panel - 7 Bar		
Length	#	Weight (lbs)
6'	756*	59
8'	766	77
10'	776	91
12'	786	109
14'	796	123
16'	806	141

## WALL CONNECTORS



Horizontal  
#1111



Vertical  
#1110

These connectors bolt to a post or wall and connect with a pin to the panel.

2"x 5" plate x 2-1/2" deep

Style	#	Weight (lbs)
Horiz.	1111	0.8
Vertical	1110	0.8

## CONNECTORS:

### LINKS

Connect multiple panels at one connection. Use two links for each panel connection.



#1112 - 0.5 lbs  
1-1/2" x 4" x 1/4"



### 4' PINS

When you have two items that need to be connected, insert the connector pin through both the top and bottom connector to create a secure link.

#1313 - 0.5 lbs  
3/4" OD x 48"

## Most popular

The 5 bar, 10' Handy Panel is the most popular of our panels. This light weight utility panel with included pins makes a great portable panel. Terrific for low stress perimeter fencing, creating a temporary pen, or for securing a wellhead. We maintain a large stock of these panels. ( Item #720 )

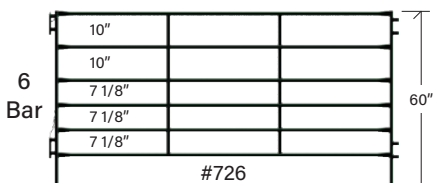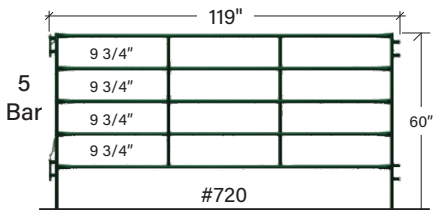

5' High Handy Panel - 5 Bar & 6 Bar		
Length	#	Weight (lbs)
10'	720	58
12'	730	70
10'	726	67
12'	736	80

## Livestock panel sizes


The actual length of all Hi-Hog panels is 1" less than the descriptive name. For example a panel that is described as 10' long is actually 9'-11" long, or 119" (this measurement is made from the outside edge of the panel connectors).

## What's in stock?

Hi-Hog maintains a large inventory of stock items. Please note however, some low demand items are built in small quantities and may not be in stock at time of order. These items are regarded as Special Order items. Special Order items are identified with an asterisk following the item number.


## 2-7/8" O.D. STEEL POSTS

\*Non-stock, special order

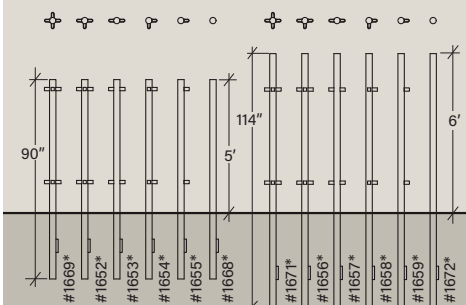




## PANELS WITH MAN GATES

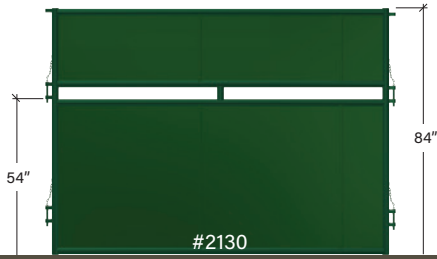


**#2130**  
7' High Heavy Duty Panel - Sheeted

Length	#	Weight (lbs)
4'	2100 *	143
6'	2110 *	216
8'	2120	277
10'	2130	350
12'	2140	441
14'	2150	519
16'	2160	585

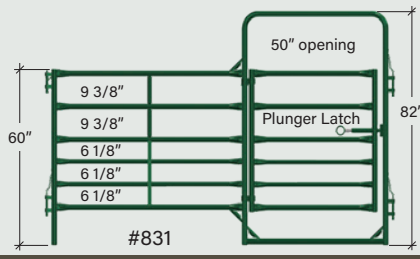

**#831**  
5'h Heavy Duty Panel - 6 Bar w Gate

Length	#	Weight (lbs)
-	-	-
6'	811 *	123
8'	821	135
10'	831	155
12'	841	173
14'	851 *	190
16'	861 *	210

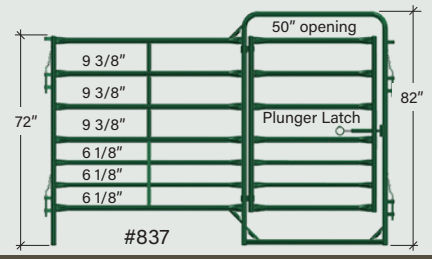


**#837**  
6'h Heavy Duty Panel - 7 Bar w Gate

Length	#	Weight (lbs)
4'	-	-
6'	817 *	131
8'	827	151
10'	837	175
12'	847	196
14'	857 *	217
16'	867 *	244

## CONNECTOR POSTS


Connector posts are used at the junction of multiple panels as an option to the connector link.



Style	O.D.	Height	#	Lbs
4 way	1.5"	58"	1100	7
3 way	1.5"	58"	1090	7
4 way	1.9"	71.25"	1101	11
3 way	1.9"	71.25"	1091	11

## 7' CONNECTOR POSTS

84" Connector posts are used at the junction of multiple panels in Bison System as an option to the connector link. The Connectors line up with all Hi-Hog Alley Components.





Style	O.D.	Height	#	Lbs
4 way	1.9"	84"	2196	14.5
3 way	1.9"	84"	2195	14

## 4-1/2" O.D. STEEL POSTS


**\*Non-stock, special order**  
Fits 6-Rail Heavy Duty Gates only

Gate Posts

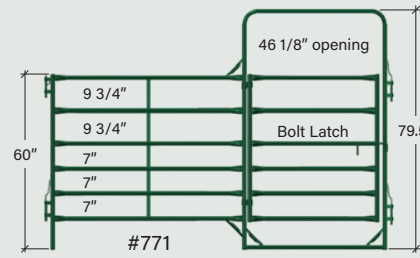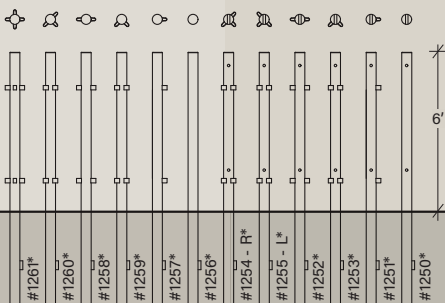


**#771**  
5' High Corral Panel - 6 Bar with Gate

Length	#	Weight (lbs)
6'	751 *	80
8'	761 *	92
10'	771	108
12'	781	119
14'	791 *	135
16'	801 *	150

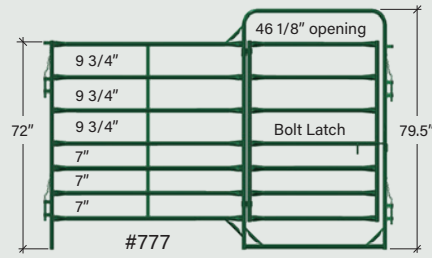

**#777**  
6' High Corral Panel - 7 Bar with Gate

Length	#	Weight (lbs)
6'	757 *	89
8'	767 *	103
10'	777	121
12'	787	134
14'	797 *	152
16'	807 *	170

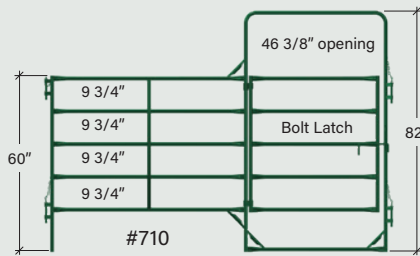

**#710**  
5' High Handy Panel - 5 Bar with Gate

Length	#	Weight (lbs)
10'	710	91

## Built for durability

When a standard tubing panel is hit, it will bend and remain deformed. When a high tensile steel panel is hit, it will bend and then return to its original shape. The higher the tensile strength the more likely the panel will retain its original shape. Hi-Hog uses 60,000 psi high tensile tubing or better. Feel free to compare Hi-Hog's tensile strength with other brands.




## # 3977 Guy Wire Cattle Guards

For hazards such as guy wires or other utilities, Hi-Hog's modular, easy installation panels protect your animals and utilities.

- Constructed with 1-1/2", 16-gauge High Tensile North American Steel Tubing.
- Finished with our High Visibility "Safety Red" durable Polyester Powder Coat Finish

See Page 46 for more Wellsite Fencing Options


# GATES / GATE LATCHING OPTIONS

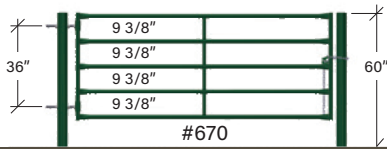

48" High Heavy Duty Gate - 5 Bar		
Length	#	Weight (lbs)
4'	640	54
6'	650	70
8'	660	89
10'	670	105
12'	680	124
14'	690	141
16'	700	157
18'	7218	176
20'	7220	193




59.25" High Heavy Duty Gate - 6 Bar		
Length	#	Weight (lbs)
4'	645	62
6'	655	82
8'	665	105
10'	675	124
12'	685	148
14'	695	167
16'	705	187
18'	7318*	210
20'	7320*	229

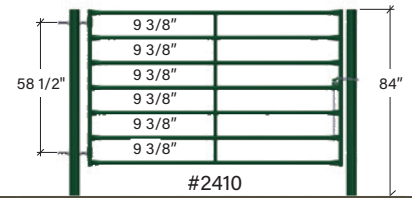

70.5" High Heavy Duty Gate - 7 Bar		
Length	#	Weight (lbs)
4'	2404*	70
6'	2406*	93
8'	2408*	120
10'	2410*	143
12'	2412*	170
14'	2414*	192
16'	2416*	215


\* Denotes a non-stock item



48" High Corral Gate - 6 Bar		
Length	#	Weight (lbs)
4'	570	51
6'	580	68
8'	590	86
10'	600	100
12'	610	118
14'	620	132
16'	630	149
18'	7118	164
20'	7120	181

## Item Numbers and Availability of Gate Latch Options *(note: shaded items below are special order)*

	Gate Length	Standard Chain	Medium Plunger	Heavy Duty Plunger	Horse Back Lever	Horse Back Lever
					Medium	Heavy Duty
Handy 42" high	4'	500	5001	-	5003	-
	6'	510	5101	-	5103	-
	8'	520	5201	-	5203	-
	10'	530	5301	-	5303	-
	12'	540	5401	-	5403	-
	14'	550	5501	-	5503	-
	16'	560	5601	-	5603	-
	18'	7018	-	-	-	-
Corral 48" high	4'	570	5701	5702	5703	5704
	6'	580	5801	5802	5803	5804
	8'	590	5901	5902	5903	5904
	10'	600	6001	6002	6003	6004
	12'	610	6101	6102	6103	6104
	14'	620	6201	6202	6203	6204
	16'	630	6301	6302	6303	6304
	18'	7118	-	-	-	-
Heavy Duty 48: high	4'	640	6401	6402	6403	6404
	6'	650	6501	6502	6503	6504
	8'	660	6601	6602	6603	6604
	10'	670	6701	6702	6703	6704
	12'	680	6801	6802	6803	6804
	14'	690	6901	6902	6903	6904
	16'	700	7001	7002	7003	7004
	18'	7218	-	-	-	-
Heavy Duty 59.25" high	4'	645	6451	6452	6453	6454
	6'	655	6551	6552	6553	6554
	8'	665	6651	6652	6653	6654
	10'	675	6751	6752	6753	6754
	12'	685	6851	6852	6853	6854
	14'	695	6951	6952	6953	6954
	16'	705	7051	7052	7053	7054
	18'	7318	-	-	-	-
20'	7320	-	-	-	-	




42" High Handy Gate - 5 Bar		
Length	#	Weight (lbs)
4'	500	33
6'	510	46
8'	520	58
10'	530	68
12'	540	81
14'	550	91
16'	560	110
18'	7018	123
20'	7020	136


## GATE DIMENSIONS

The Handy Gate length is 9'-7". The Corral and Heavy Duty Gate length is 9'-6.75"  
The gate length is measured from the outside edges of the gate verticals (not including hinge collars).

A 10' gate is designed to fit a 10' opening. The center of the top hinge is approximately 6" below the top of the gate vertical (with the gate mounted approximately 12" above grade).

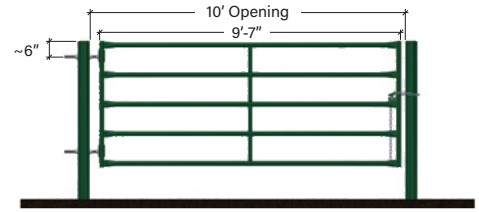

## ROAD CONTROL GATES 2 - #8812 = 24' Inside Span

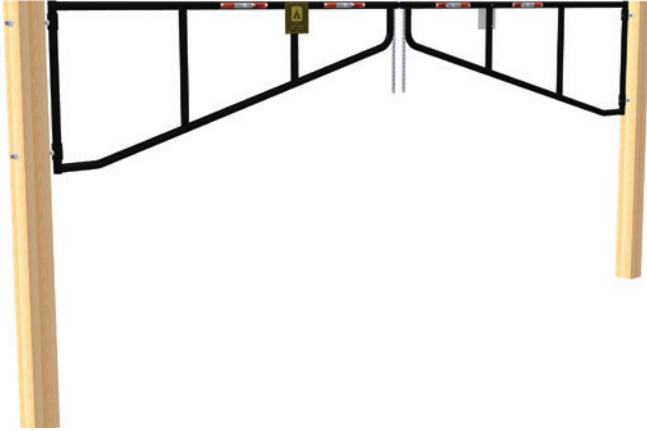

Add a layer of security to prevent break-ins and vandalism

- Special Order Park Access Gates 24' Inside double gate width.
- Common 2 lane entrances can be spanned by a single gate, but for wider entrances double swing gates give added stability.
- Manual swing-open barrier gates are made of heavy duty welded steel construction. They are typically powder coated in gloss black or Hi-Hog green with fluorescent hazard tape.

\* Road Control Gates are a Special Order Item, please contact Hi-Hog for quotes and design assistance.

## STANDARD CHAIN LATCH

Unless specified by the customer, all Hi-Hog gates come complete with 48" of 1/4" chain as well as a simple chain latch.

To latch, slide the chain into the locking slot and then pull the chain through the hole in the latch.



## PLUNGER LATCHES

The medium plunger latch works in most situations. The heavy latch is suitable for stockyard or bison systems.

Medium >



Heavy >



Model	Bolt Size	#	Weight (lbs)
Medium	7/8"	1331	4
Heavy	1-1/8"	1330	6

## HORSE-BACK LEVER LATCHES


Simply lift the handle and push towards the spring loaded plunger latch to release (Plunger Latch sold separately). To close the gate just push the gate shut and it will lock automatically. Each gate model requires a specific lever latch (refer to the selection chart below). If ordering a gate with latch installed, see the table on page 31 for the item number.



Fits this Gate	#	Weight (lbs)
Handy	1321	5.4
Corral	1322	6.6
Heavy Duty 4' high	1323	5.8
Heavy Duty 5' high	1324	7.7
Round Pen	1325 *	5.9

## HORSE-BACK DROP LATCHES

The drop latch is designed to be operated from horse back. A 4" rod slides through tubing that is attached to the end of the gate at a 45 degree angle. This latch uses gravity and requires the operator to lift the latch for both opening and closing.



HORSE BACK DROP LATCH			
Model	Bolt Size	#	Wt (lbs)
Medium	7/8"	1334	9
Heavy	1-1/8"	1333	18.5

## WELD-ON STRIKER PLATE

Dimensions: 4"w x 4"h x 2"d  
Plate is 3/16" thick, Made to fit a 2-7/8" Dia. Post



Model	For Bolt Size	Slot Width	#	Weight (lbs)
Heavy	1-1/8"	1.5"	1650	2

## BOLT-ON STRIKER PLATE

Dimensions: 7-3/8"w x 4"h x 1-3/8"d  
Plate is 3/16" thick, 7/16" diameter bolt holes



Model	For Bolt Size	Slot Width	#	Weight (lbs)
Heavy	1-1/8"	1.5"	1651	1.3

## U-FRAMES WITH GATES

An excellent economical alternative to the traditional overhead bow gate, for those who do a lot of tractor work, or for providing access for oversized vehicles, such as oilfield service equipment.

U-Frames offer a wider range of options over traditional bow gates. The U-Frame allows for alley widths up to 18' and gate widths up to 16'.

The U-Frames are available in both 5' and 6' heights.

The heavy duty U-frame is built for strength and durability. The strength of the U-frame is secured in the 4.5" OD foundation tube.


The 13" steel trussed hinge post provides superior strength to support the gate without deflection.

The 13" trussed offset creates a safe zone where a handler can safely escape.

The hinge post comes with sleeves designed to fit any of our standard corral or heavy duty gates with adjustable hinges.

**Because the gate is a separate option, it can be easily removed and/or replaced.**


Gates can be purchased with a chain latch or a 7/8" plunger latch. The included striker plate is set at a height for use with Hi-Hog's heavy duty gates. If you wish to use a corral gate with a 7/8" plunger latch, you will need to purchase and mount an additional weld-on striker plate; #1648 (call for instructions).

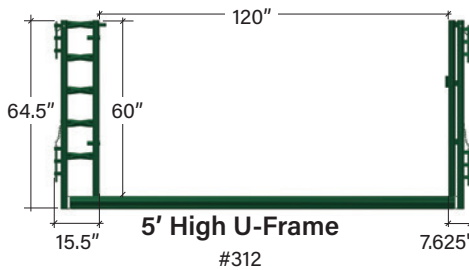

**5' High U-Frame**

#312

60" High U-Frame		
Length	#	Weight (lbs)
8'	308 *	172
10'	310	194
12'	312	215
14'	314	237
16'	316	259
18'	318	280

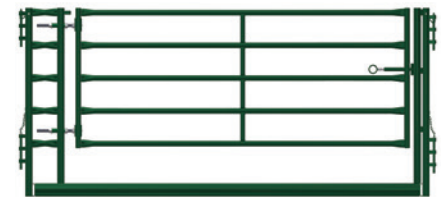

**5' High U-Frame with HD Gate**

#312 + #6701

60"h U-Frame		HD Gate w Plunger Latch
Length	#	5' high
8'	308 *	6'L - #6501
10'	310	8'L - #6601
12'	312	10'L - #6701
14'	314	12'L - #6801
16'	316*	14'L - #6901
18'	318*	16'L - #7001

### U-Frame Extension Set

#	Height	Weight (lbs)
305 *	12"	27



Item #305

The optional item #305 can be added to an existing U-frame to add 12" to the height.


Note: The U-Frame will connect with any Hi-Hog panel. Be aware that the bottom 4.5" O.D. rail is intended to be buried below grade. If you are installing on top of a finished surface such as concrete, this rail may present a hazard.



**6' High U-Frame**

#312-6

72" High U-Frame		
Length	#	Weight (lbs)
8'	308-6 *	188
10'	310-6	209
12'	312-6	231
14'	314-6	253
16'	316-6	274
18'	318-6	296

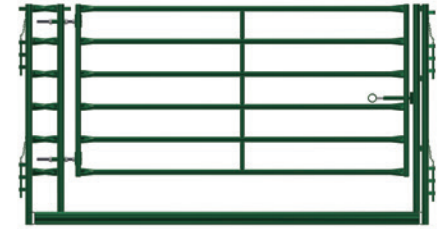

**6' High U-Frame & Gate combo**

#312-6 + #6751

72"h U-Frame		HD Gate Pairing
Length	#	6' high
8'	308-6 *	6'L - Gate #6551
10'	310-6	8'L - Gate #6651
12'	312-6	10'L - Gate #6751
14'	314-6	12'L - Gate #6851
16'	316-6	14'L - Gate #6951
18'	318-6	16'L - Gate #7051

## U-SPREADERS

Like the U-Frame, U-Spreaders allow you to fix the width of an alley without using posts in the ground or an overhead spreader.

- The posts are built with heavy 2-3/8" OD (.154 wall) tubing and are open top and bottom.
- The Ground Rail is 2 7/8" OD (.203 wall) tubing.
- The posts are welded to a U-Bracket, which is also a cap for the ground rail and reinforced with 6" gussets.



**6' High U-Spreader**

#1745

72" High U-Spreader		
Length	#	Weight (lbs)
4'	1741 *	74
6'	1742 *	86
8'	1743	97
10'	1744	109
12'	1745	120
14'	1746 *	132

## FRAMES WITH GATES


Frames with gates as well as overhead alley spreaders provide a versatile corral option. The common connector system allows you to use any of these items with any Hi-Hog panel. If you need the gate somewhere else, simply un-pin it and move it to the new location. The #382 - Calf Sorting Gate and #1160 - Calving Enclosure Gate in 7' high Frame, provide additional Frame & Gate options. [See pages 37 and 35.](#) The actual length of a frame & gate is 1" less than the descriptive name. For example, a frame & gate that is described as 12' long is actually 11'-11" long from the outside edge of the panel connectors.



#350



#351




#1540

### Heavy Duty Gate in 7' High Frame


L	Gate Ht	#	Wt (lbs)
4'	60"	350	109
6'	60"	352	137
4'	71-1/4"	351	117
6'	71-1/4"	355	155

### Handy Gate in 7' High Frame

L	Gate Ht	#	Wt (lbs)
4'	60"	1540	46



#370




#375

### Heavy Duty Gate in 8' High Frame


L	Gate Ht	#	Wt (lbs)
8'	60"	360	185
10'	60"	370	214
12'	60"	380	246

### Corral Gate in 8' High Frame

L	Gate Ht	#	Wt (lbs)
8'	60"	365	143
10'	60"	375	164
12'	60"	385	189



#371



#376

### Heavy Duty Gate in 8' High Frame

L	Gate Ht	#	Wt (lbs)
8'	71-1/4"	361	199
10'	71-1/4"	371	231
12'	71-1/4"	381	267

### Corral Gate in 8' High Frame


L	Gate Ht	#	Wt (lbs)
8'	71-1/4"	366	153
10'	71-1/4"	376	176
12'	71-1/4"	386	204

\* Denotes a Non-Stock Item

## OVERHEAD SPREADERS



#1690



#1700

### Alley Spreader - 1 Piece Frame


L	Frame Ht	#	Wt (lbs)
4'	7'	1660 *	74
8'	8'	1670 *	104
8'	10'	1680 *	116
10'	8'	1690	116
12'	8'	1720 *	128

### Alley Spreader - 4 Piece Frame

L	Frame Ht	#	Wt (lbs)
10'	10'	1700 *	147
10'	12'	1710 *	159
12'	10'	1730 *	159
12'	12'	1740 *	171

The actual length of an overhead alley spreader is 9 1/4" longer than the descriptive name. For example, a 12' long overhead alley spreader is actually 12'-9 1/4" long from the outside edge of the spreader connectors. The end posts come with three-way connections.

Note: 10' and 12' high overhead frames with gates are available by special order. If you require more than 8' of overhead clearance we recommend Hi-Hog's U-Frames with gates as they offer unmatched clearance and more versatility. The one exception is if you intend to install your frames with gates on a solid surface. In this situation the base rail of the overhead frame is a smaller diameter compared to the 4.5" diameter U-frame bottom rail.



#2610



#2510


### 8' Frame with 84" high Gate - 7 Bar

Length	#	Weight (lbs)
8' x 8'	2608 *	255
10' x 8'	2610 *	297
12' x 8'	2612 *	344

### 8' Frame with 84" high Gate - Sheeted

8' x 8'	2508 *	399
10' x 8'	2510	477
12' x 8'	2512	567

## CATTLE GUARDS

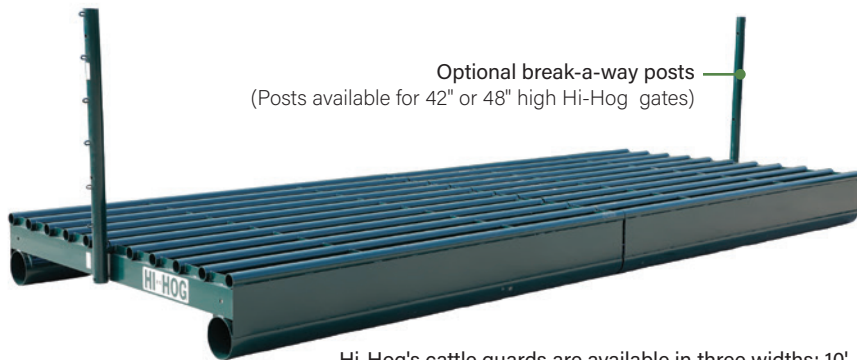


Optional break-a-way posts  
(Posts available for 42" or 48" high Hi-Hog gates)

Hi-Hog's cattle guards are available in three widths; 10', 14' and 18'.  
If you require a wider cattle guard, you can combine cattle guards.  
When combining cattle guards you will require a connector set #3529

Engineered for  
4,250 KG/pair of wheels.

### Sill Options

- If you're placing your cattle guard on concrete sills, (or other structural support) select cattle guards with no sills



- If you're digging a trench and installing your cattle guard on stable ground, select a cattle guard with single sills
- If you're digging a trench and installing your cattle guard on unstable ground, order your cattle guard with double sills

Posts and pasture gates are optional. Please note that we offer two post styles.

- If you are planning to install Hi-Hog's 42" high handy gates, order post #3526.
- If you plan to install Hi-Hog's 48" high corral or heavy-duty gates, order post #3525.

### Cattle Guards

Road Width	No. of Sills	#	Weight (lbs)
10'	None	3610n*	1106
14'	None	3614n*	1506
18'	None	3618n*	1906
10'	Single	3810n	1420
14'	Single	3814n	1945
18'	Single	3818n	2570
10'	Double	3910n*	1702
14'	Double	3914n*	2340
18'	Double	3918n*	2979


### Cattle Guard Options

Description	#	Weight
Set of Smooth Ride Bars	3825*	255 lbs.
Cattle Guard Connector Set	3529	9 lbs.
Break-a-way post for 42" h Gate	3526	35 lbs.
Break-a-way post for 48" h Gate	3525*	40 lbs.

\*Denotes Non-Stock Item

Each set of smooth ride bars provide two, 22" wide tracks mounted 48" apart.

Smooth Ride Bar Set



When ordering your smooth ride bars, let us know how many sets of smooth ride bars you require, and where on the cattle guard you wish to have them installed.


## WELLHEAD FENCE

Protect your investment and lower your risk with Hi-Hog's heavy duty wellhead fencing.

The cattle guard fence of choice for oilfield, pipeline and utility companies. The quick connect design offers superior flexibility for set-up on uneven terrain. The top rail connector removes the leg trap found on other enclosures.

Quick installation  
No Tools Required

Tubing is coned to ensure there are no sharp edges.

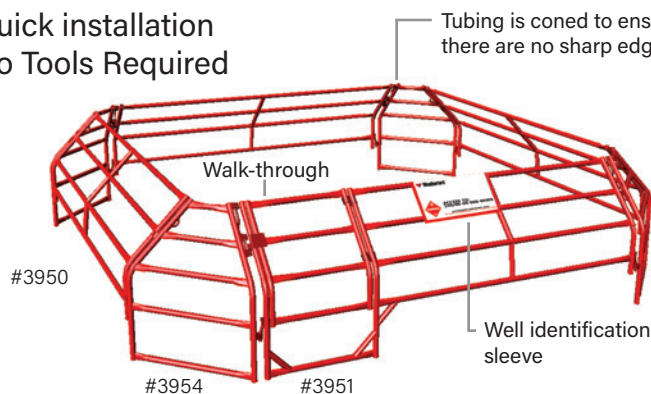

### Wellhead Fence

Panel Description	#	Weight (lbs)
5' Well Fence Panel	3955	28
10' Well Fence Panel	3950	48
10' Well Fence Panel with Man Gate	3951	67
Well Fence Connector	3953	17
2' Well Fence Outside Corner Panel	3954	24
2' Well Fence Inside Corner Panel	3959*	35

Well Fence, Guy Wire Guards and Cattle Guards are built several times a year, but may not always be in stock. Please call for availability.

## GUY WIRE GUARDS

### Guy Wire Cattle Guard


Description	#	Weight (lbs)
Guy Wire Panel	3977	26



For small hazards such as guy wires, these panels offer an alternative to our standard wellhead fence system.

Simply pin three panels around the hazard and if necessary stake them to the ground (ground stakes included).

## 3-POINT HITCH BALE SPEAR

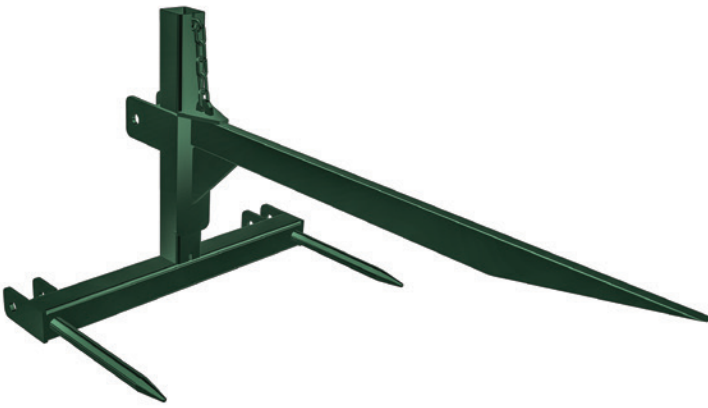

The three point hitch bale spear allows you to lift and move bales without dismounting from the tractor. This bale spear will fit on the 3-point hitch of most category #1 & #2 tractors.

The spear is made from heavy steel plate, 1" x 3" x 48". The spear is equipped with 2 stabilizing prongs to prevent the bale from spinning. Adjust the height of the main spear with the provided chain.

3-Point Hitch Bale Spear	
#	Weight (lbs)
1580	101


## BUCKET MOUNT BALE SPEAR



This attachment can be mounted to all front end loader buckets.

### Mounting Instructions:

1. Level the bucket to waist height
2. Suspend bale spear on bucket edge with mounting prong  
**Note: The mounting prong is designed to assist in mounting the spear, it is NOT designed to carry the weight of a bale**
3. Hook your mounting chain to one of the chain loops on the mounting arm
4. Route the chain behind the bucket. The chain should travel over the top of the bucket, down under the spear and back over the top of the bucket and attach to the other mounting chain loop
5. Use a chain binder to cinch the chain tight. **Note: Chain & binder are not included.**

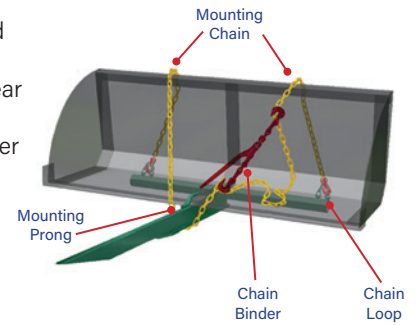

Bucket Mount Bale Spear	
#	Weight (lbs)
1600	94

## NIFTY FEED DISPENSER

### Shipping Dimensions

Drum diameter: 60 9/16"  
Drum width: 29 3/4"  
Drum width with axle sleeves: 35 3/4"  
(Shown with axle extensions attached)



The Nifty feed dispenser allows one person with a round bale handler or trailer style feeder, to load, transport and dispense grain, cake feed, pellets or supplements to livestock under range feeding conditions.

The Nifty Dispenser can now be used with the #1574 Multi-Use Trailer.


The 37 bushel capacity dispenser will help with winter and summer supplementing, pre-breeding conditioning, or extended pasture during drought conditions. The feeder dispenses feed at 15 foot intervals. The adjustable hopper opening allows you to control how much feed is dispensed with each rotation. The baffled interior permits mixing of supplements into the feed. The Nifty feeder can deliver enough supplement for up to 250 head in a single trip.

Nifty Feed Dispenser	
#	Weight (lbs)
8965	738

## NIFTY FEED DISPENSER TRAILER

### Shipping Dimensions

Length: 123 7/16"  
Width: 70 11/16"  
Height: 40 3/8"

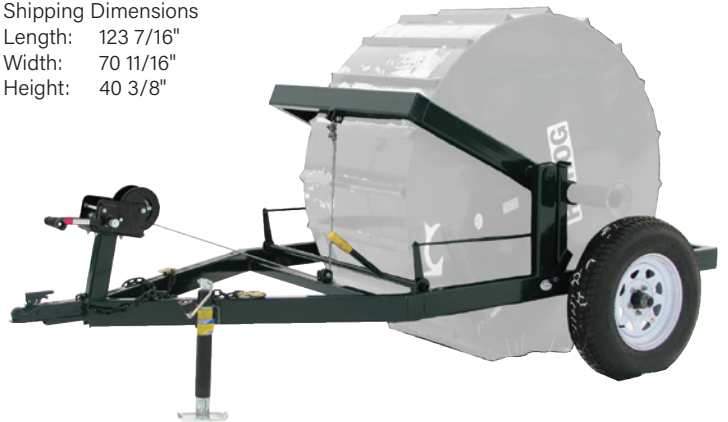

The Nifty feed dispenser trailer provides an additional method for transporting and dispensing feed with your Nifty feed dispenser. This heavy duty trailer has been designed to make it easy to load, transport and feed with your Nifty feed dispenser.


- Maximum gross weight of a loaded Feed Dispenser Trailer is 4,000 lbs. This is based on the load limit of the tires we are using.
- The combined trailer and dispenser weight is 1,237 Lbs

### Includes:

- New 15" tires
- 2" lockable ball hitch
- Heavy cross tie chains
- 2000 lb winch with auto lock
- 2000 lb trailer jack
- Dispenser sold separately

Nifty Feed Dispenser Trailer	
#	Weight (lbs)
8966	476

## SLANTBAR FEEDER PANEL

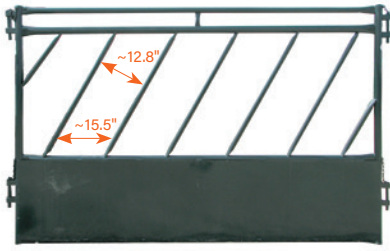


A double top rail provides additional strength. Tubing ends have been coned to eliminate sharp edges. Panels are 60" high.

Construction\*: 1-1/2" OD, 14 ga. for the top rail. 1.9" OD, 12 ga for the two interior horizontals and 1.9 OD 14 ga. for the bottom horizontal and outside verticals. The slant bar stanchions are 1-5/16" OD, 0.125 wall.

\*The 16' slant bar panel is built heavier.


## TOMBSTONE FEEDER PANEL

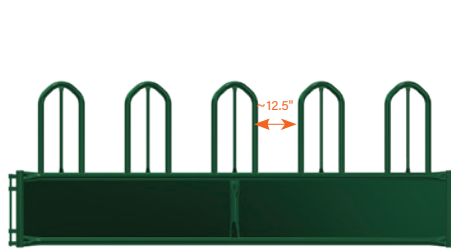

The Tombstone Feeder Panel provides improved access for horned animals such as cattle or bison, and is preferred for feeding horses because there is no top horizontal bar for the horses to wear their manes on.

Construction: 2-3/8" OD, for the panel frame. 1.9" OD, 14 ga, for the tombstone hoops, and 1" OD, 14 ga. for the interior vertical inside the tombstone hoops. Panels are 49" high.

## CREEP FEEDER PANEL

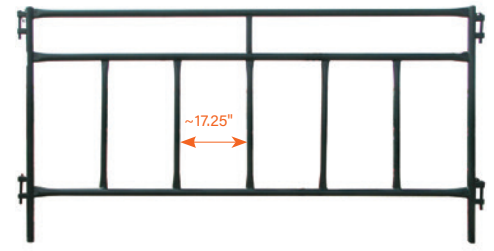

The 60" high Creep Panel is used to help separate calves from their mothers. The stanchions are wide enough (17.25" opening) for calves to step through to access feed, while the cows are restricted to one side. Tubing ends have been coned to eliminate sharp edges.

Construction: Built from 1-1/2" OD, 16 ga. & 1.9 14 Ga hi-tensile steel tubing.

Slant bar Feeder Panels			
Length	Feed Pos.	#	Weight
8'	5	980 *	139 lbs
10'	6	990	168 lbs
12'	8	1000	199 lbs
16'	10	1010 *	294 lbs

Tombstone Feeder Panels			
Length	Feed Pos.	#	Weight
7'-1"	2	1050	112 lbs
9'-6"	3	1060	151 lbs
11'-7"	4	1070	183 lbs
16'	6	1080 *	272 lbs

Creep Feeder Panels			
Length	Feed Pos.	#	Weight
9'-11"	6	1490	81 lbs

\* Denotes a non-stock item

## HURRICANE MULTI-BALE FEEDER




The Hurricane Multi-Bale Feeder is a rugged two bale feeder. To assemble this feeder simply combine two 8'-5" straight Hurricane Feeder Panels with two 14'-8" straight Hurricane Feeder Panels. The panels pin together to create a rigid corner brace. Panels are 60" high. Stanchion width is 13.5".

The stanchions project in towards the bale to keep feed inside the feeder. This feeder has 30 feeding positions. This feeder can be extended by using an 8' U-frame as a spreader (#1743). These panels can also be used as fence line feeder panels.

Hurricane Multi-Bale Feeder			
#	Quantity	Length	Item Weight (lbs)
1245	2	8'-5"	157
1246	2	14'-8"	269

## HURRICANE SQUARE BALE FEEDER

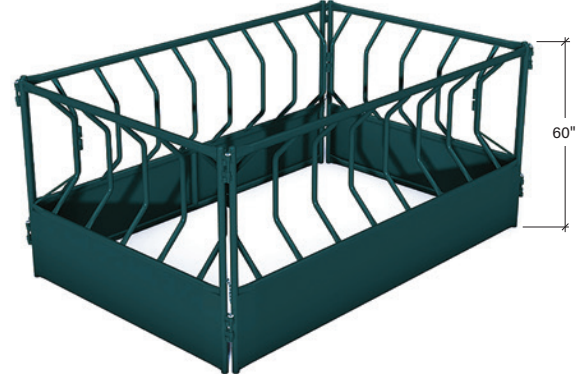


The Hurricane Square Bale Feeder has an inside dimension of 8'-11" x 5'-2". To assemble this feeder simply combine two 7'-2" straight Hurricane Feeder Panels (#1244) with two 10'-11" straight Hurricane Feeder Panels (#1248). The panels pin together to create a rigid corner brace. Panels are 60" high. Stanchion width is 13.5".

The stanchions project in towards the bale to keep feed inside the feeder. This feeder has 22 feeding positions. These panels can also be used as fence line feeder panels.

Hurricane Square-Bale Feeder			
#	Quantity	Length	Item Weight (lbs)
1244	2	7'-2"	136
1248	2	10'-11"	202



## TWISTER ROUND BALE FEEDER

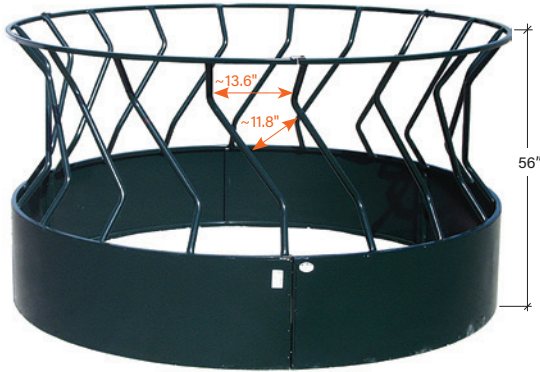

### Cow/Calf Feeder

Construction: The frames are 1" square tubing 0.100 wall. The stanchions are 1-5/16", 0.125 wall. The bale saver stanchions project inwards to reduce feed waste. The stanchions are slanted diagonally to deter livestock from climbing into the feeder. The 20.75" high base is sheeted on the outside with 16 gauge sheet metal. Three sections bolt together to create a solid cow/calf feeder.

The Twister Round Bale Feeder provides the best value for your dollar.

18 Feeding Positions

85" ID, 101" OD

Twister Round Bale Feeder	
#	Weight (lbs)
961	327

## HURRICANE ROUND BALE FEEDER



### Cow/Calf Feeder

Construction: The frames are 1.9" OD 14 gauge. The stanchions are 1-1/2", 14 ga. The bale saver stanchions project inwards to reduce feed waste. The 22" high base is sheeted on the outside with 16 gauge sheet metal. Three sections pin together to create a solid cow/calf feeder.

Hi-Hog's Heavy Duty Cow / Calf feeding option.

18 Feeding Positions

88.5" ID, 108" OD

Hurricane Round Bale Feeder	
#	Weight (lbs)
913	354

## TORNADO ROUND BALE FEEDER



### Bull Feeder

Construction: The frames and stanchions are 1.9" OD, 14 gauge. The bale saver stanchions project inwards to reduce feed waste. The 22" high base is sheeted on the outside with 16 gauge sheet metal. Three sections pin together to create a solid bull feeder.

15 Feeding Positions.

89" ID, 108" OD

Tornado Round Bale Feeder	
#	Weight (lbs)
923	355

## TOMBSTONE ROUND BALE FEEDER



### Cow / Calf / Bison / Horse Feeder

Construction: 1.9" OD high tensile, 12 gauge tubing for the frame, and 1.9" OD, 14 gauge for the hoops. Each of the hoops is filled with 1" OD 14 gauge interior vertical. Each corner and tombstone hoop is also braced. The 22" high base is sheeted on the outside with 16 gauge sheet metal. Three sections pin together to create a solid, versatile Stock feeder. This feeder is preferred by ranchers with horned livestock. There is no top horizontal hoop for horses to wear their manes on. 12 Feeding Positions

95" ID, 113" OD

Tombstone Round Bale Feeder	
#	Weight (lbs)
954	390

## STANDARD BOX STALL FRONT

Over forty years of design improvements have resulted in the refined and polished Standard Box Stall of today; a simple design perfectly executed.

The quality and condition of your stabling environment affects the health and performance of your horse. Surround your horse with The Standard your horse desires and deserves.

Note: The stall front shown is a Right Hand Stall Front because the door is located on the right side when you look at the front of the stalls. For assistance laying out your stables call us and we can prepare a scaled plan for you. **Lumber not included**



Item #1630

\*Add 24" for 12' fronts

Standard Stall Front - Comes with Feed Gate				
Length	Height	Door	#	Weight (lbs)
10'	7'-4"	Right	1630	235
10'	7'-4"	Left*	1631	235
12'	7'-4"	Right	1640	256
12'	7'-4"	Left*	1641	256



Item #4210

\*Add 24" for 12' open top partitions

## OPEN-TOP PARTITION

Open-Top Partitions are available in 10' and 12' lengths. The heavy duty 1.9" OD, 14 gauge steel frame provides safety and security. The vertical bars are set on 4" centers (3" opening). To finish assembly simply slide the lumber of your choice into the integrated channels and bolt the last piece in place.

The Open Top Partition will bring more light and better ventilation into the stall. Open top partitions are recommended for end stalls or where the neighboring horses are comfortable with each other. **Lumber not included**

Open Top Partition			
Length	Height	#	Weight (lbs)
10'	7'	4210	154
12'	7'	4212	181



Item #4110


\*Add 24" for 12' All Plank partitions

## ALL-PLANK PARTITION

All-Plank Partitions are available in 10' and 12' lengths. The heavy duty 1.9" OD, 14 gauge welded steel frame provides the safety and security that you demand.

Designed for quick installation. The partitions pin directly to the stall fronts. Channels are built into the frame to receive your lumber. Simply slide the lumber into the channel and secure the last board in place. Additional rigidity is achieved by tying each of the boards to the included strapping set (the vertical flat bar shown in the middle of the partition). The 10' partition includes one strapping set and the 12' partition includes two strapping sets. **Lumber not included**

All-Plank Partition			
Length	Height	#	Weight (lbs)
10'	7'	4110	93
12'	7'	4112	123



Item #4211

\*Add 24" for 12' open top foaling partitions

## FOALING PARTITION

Foaling Partitions are available in 10' and 12' lengths. The heavy duty 1.9" OD, 14 gauge steel frame provides strength and security.


Foaling Partitions are designed so they can be removed to create a large temporary foaling stall, without compromising the structural integrity of your stall structure.

If you want to include a Foaling Partition please be aware that you will also require a foaling tele-post (the tele-post goes in between the stall fronts) and a set of foaling stall brackets (#4062 x 2) at the back wall of the stall. **\* May not always be in stock. Lumber not included**


Open Top Foaling Partition		
Description	#	Weight (lbs)
10' Foaling Partition	4211*	152
12' Foaling Partition	4213*	178
Foaling Telepost	1638*	44
Foaling Spreader	1639 *	25
Foaling Wall Bracket	4062 *	1.7

Stall Hardware		
#	Description	Weight
4060	6x4 horizontal wall bracket	1.5
4061	4x6 vertical wall bracket	1.5
4062	6x4 horizontal foaling wall bracket	1.7
4063	3x5 offset wall bracket	1.2
1635	Standard 3-way connector post	13
4096	Wall Mount - Partition Channel	14
4097	Front Mount - Partition Channel	14
4098	Partition Strapping Set	14
4099	Partition Channel Set	28


### Connecting Hardware

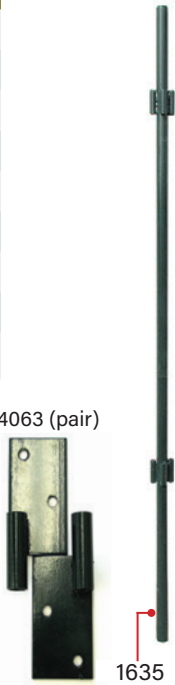

### Partition Components

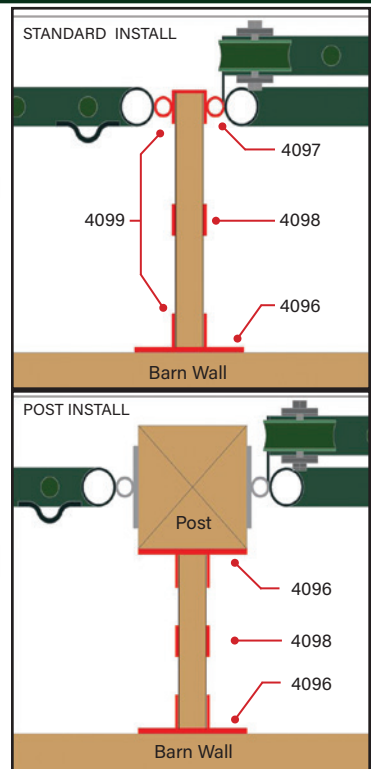

For Stand Alone Stalls, one #1635 Connector Post is required for each Bank of Stalls.

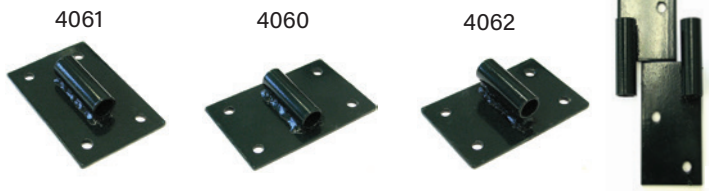

## HORSE STALL OPTIONS



**HAY MANGER**  
Wall Mount Hay Manger  
Item #4030, 20 lbs



**CORNER FEEDER**  
Corner Feeder w Support Ring  
Item #4040, 14 lbs



**BLANKET HANGER**  
Horse Head Blanket Hanger  
Item #4329, 3 lbs

## STANDING TIE STALLS AND TIE STALL MANGERS



Tie Stalls		
Description	#	Weight (lbs)
10' Tie-Stall Partition	6115	153
Tie Stall Feed Manger	6113	82



### Standing Tie Stall Partitions, Item #6115.

The partitions are 10' long. The front section is 7' tall and the back section is 52" tall.

Attach the front of the partition to the barn wall with two wall brackets (item #4061 or #4062 - see page 47). The rear of the partition comes standard with an adjustable telepost which lags to the barn floor and ceiling. The telepost ceiling bracket can be adjusted for ceiling heights from 8' to 12'.

Loops are mounted to the rear of the standing tie stall partitions for those horses that may require a rope or chain across the rear of the tie stall.

The raised front portion of the panel comes with 16 gauge sheet metal. The bottom of the panel frame includes a channel ready to accept 16 pieces of 2x8 x 47.5" lumber.


Wood and wood fasteners are not included.

### Tie Stall Feed Manger, Item #6113.

The feed mangers come with brackets for mounting at the front to a wall and sleeved brackets on the side of the manger extend to attach to the side of the tie stall partitions or the barn side wall. The manger mounts between the tie stall partitions which will be on approximately 60" centers. A tether ring is mounted on the front of the feed manger.

8 cubic foot capacity.

## PORTABLE EVENT STALLS

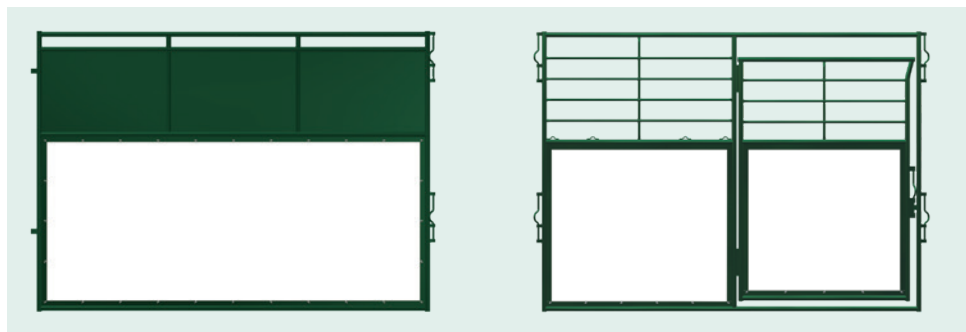

Item #4410\*  
PARTITION PANEL

Item #4404\*  
FULL HEIGHT SWING DOOR

Hi-Hog's powder coated Portable Horse Stalls are designed for quick, hassle free installation, year after year. Light enough to handle and strong enough to endure multiple installations. Ideal for equine events.

**\*Hi-Hog's Portable Event Stalls are built to order. Call us for design assistance.**

Hi-Hog Portable Stalls can be found at many of the most respected equine event facilities, including Spruce Meadows, Thunderbird Equestrian, and the Calgary Stampede.

In addition to the standard 7' high front with a full height door (shown), Hi-Hog also offers a 3/4 height swing door and a rolling door option. 8' high options can also be ordered.

Hi-Hog's Portable Horse Stalls are the easiest in the industry to install. Our partition panels come with three-way connectors on one end. This design means that a bank of back-to-back stalls will only need one portable stall post, item #4421. This makes installations a breeze.

Event Stalls requiring roofing measure 10' x 10'. Banks of back-to-back stalls can be purchased with or without roofs.

Roof tarps are designed for stall plans with a minimum size of 20' wide by 30' long (6 stalls).

For pricing please call toll free 1-800-661-7002




Portable Stalls		
Description	#	Lbs
10'w x 7'h - front	4404 *	192
10'w x 7' h - partition	4410 *	182
12'w x 7'h - front	4423 *	220
12'w x 7'h - partition	4409 *	214
3-way Connector Post	4421 *	10

## PORTABLE HORSE CORRALS

- 50" high panels
- Folded length of 6'-10"
- Unfolded length of 13'-6"
- 1.5" OD 60,000psi high tensile steel construction
- Powder coat paint finish
- One hand latching
- Sets up quickly, easily & securely
- 3 legs per panel for stable, one person set-up
- Extended shephard latch securely locks two panels together



Description	#	Weight
Folding Corral Panel	746	57 Lbs
4-way Connector Post	742	10.5 Lbs

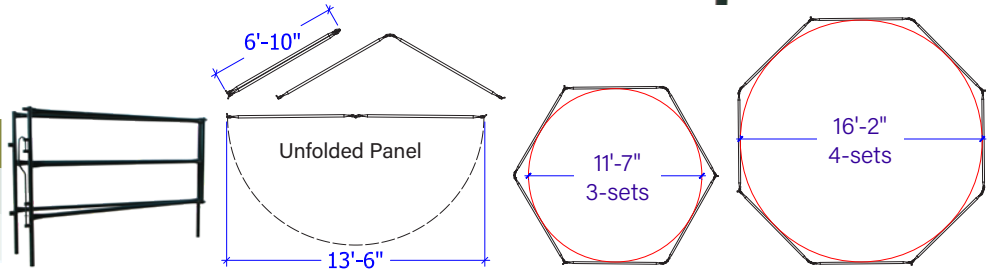

## ROUND PENS - DESIGNED SPECIFICALLY FOR THE EQUINE INDUSTRY



Rocky Mountain Round Pen

Description	#	Wt (lbs)
10'-9" w x 6' h panel	2930 *	203
7' x 9' h frame w 6' gate	2935 *	252

The 6' high Rocky Mountain Sheeted Round Pen is designed for the equine enthusiast who wants the very best. To create a smooth and continuous 'round' ring each panel is curved. Additionally the sides are tapered for superior protection of both horse and rider.

The sheeting helps to keep your horse focused and safe. The ground should be prepared and leveled before installation.

**\*This item is available by special order.** Pen diameters for this pen are limited to a max of 76' - 8" and a min of 60'

The Standard colour of all Round Pens is "Hi-Hog Green" - Please request any Custom Colour Request - when we quote.

Rocky Mountain Round Pen

Outer Diameter	# Panels	# Gates
60'	17	1
66' - 9"	19	1
70' - 2"	20	1
76' - 8"	22	1



Savanna Round Pen

Description	#	Wt (lbs)
8'-6" w x 6' h panel	2912	89
8'-6" frame w 6' gate	2913	178

Hi-Hog's Savanna Round Pen positions itself between the Rocky Mountain Round Pen and the Parkland Round Pen.

Each panel section measures approximately 8'-6" in length (note: the panels are tapered at the bottom). Panels are 6' high.

The frame with gate is the same length as the panels so you can relocate your gate, or add a gate, simply by swapping out panels.

This pen can have a wide range of diameters. The most popular diameters are shown below.

The Standard colour of all Round Pens is "Hi-Hog Green" **\*Lumber not included**

Savanna Round Pen

Outer Diameter	# Panels	# Gates
41' - 3"	14	1
49' - 4"	17	1
60' - 3"	21	1
70' - 11"	25	1



Parkland Round Pen

Description	#	Wt (lbs)
10' w x 6' h panel	2910	80
6' x 9'-3" frame w 6' h gate	2906	101

The perfect balance of portability and strength. Constructed with 60,000 psi high tensile 1.5" steel tubing for superior strength (Gate tubing is 1.5" OD, 16 ga. except for the gate frame which is 1.9" OD, 14 ga.).

The panel design ensures there are no sharp edges by eliminating the use of flat bar and coning the ends on all end-cut tubing. Top connectors eliminate the leg trap gap between panels. Mud legs provide additional support and resistance against sinking in soft conditions.

This pen can have a wide range of diameters. The most popular diameters are shown below. See website for full list


Parkland Round Pen

Outer Diameter	# Panels	# Gates
39' - 10"	12	1
49' - 3"	15	1
58' - 7"	18	1
67' - 11"	21	1

**Bucking Chutes**  
CUSTOM ORDER



Optional Bucking Chute Crash Pad, #1759

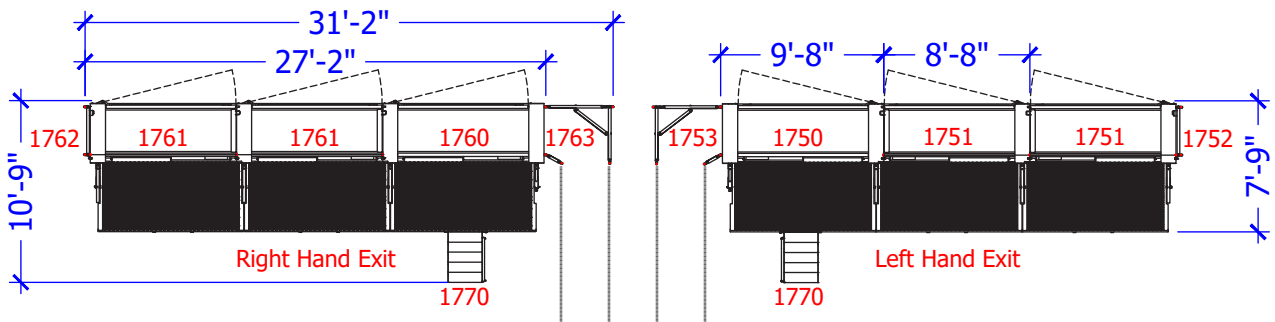


Hi-Hog's modular Bucking Chutes deliver enhanced safety, reliability, and functionality. Strong, responsive chutes that feature:

- Solid spring loaded lever latches.
- Guides lined with Tivar to reduce friction.
- Offset hinges allowing the gates to swing back flat.
- Rubber padded rolling doors that travel on a shortened upper track, supported from below.


**Modular Bucking Chute Components**

Description	Exit	#	Weight (lbs)
Lead Bucking Chute	Left	1750 *	2,206
Add-On Bucking Chute	Left	1751 *	1,670
End connecting frame	Left	1752 *	39
Bucking Chute Corner Entry	Left	1753 *	287
Lead Bucking Chute	Right	1760 *	2,206
Add-On Bucking Chute	Right	1761 *	1,670
End Connecting Frame	Right	1762 *	39
Bucking Chute - Corner Entry	Right	1763 *	287
Bucking Chute - Catwalk Stairs	-	1770 *	136
Bucking Chute Crash Pad	-	1759 *	13

**Timed Event Box - RODEO**

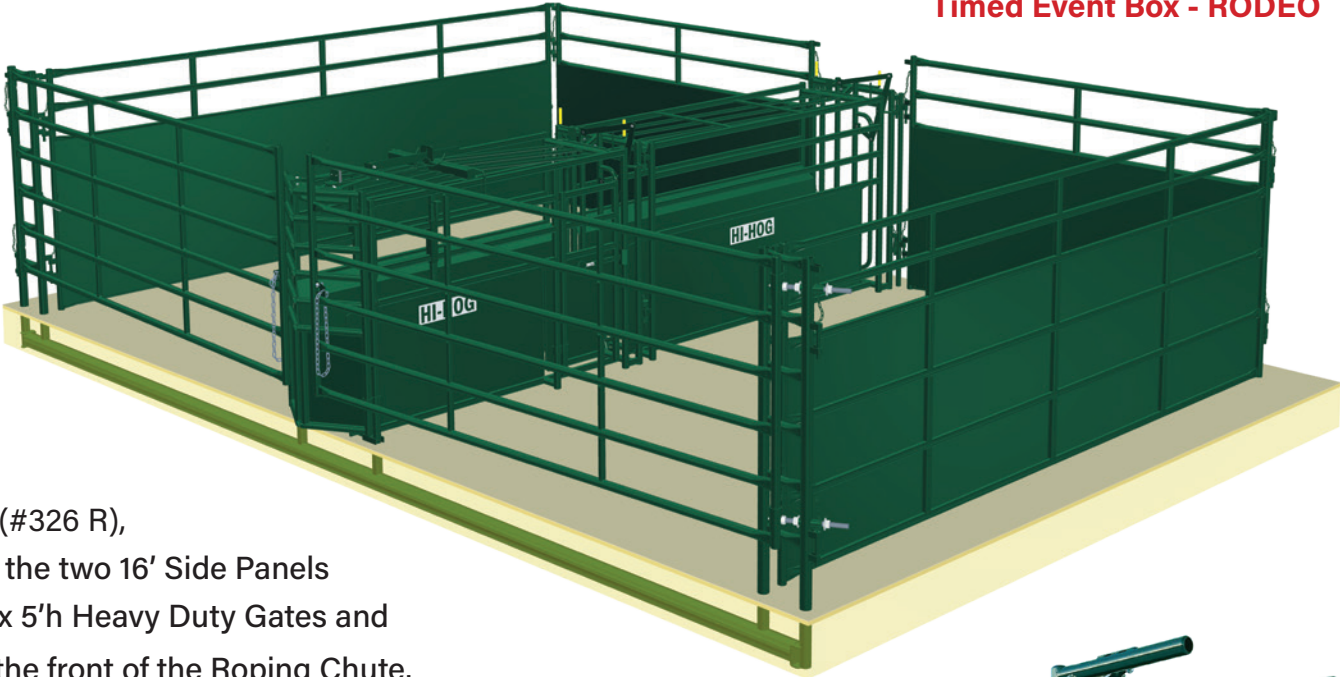

U-Frame (#326 R),  
 Supports the two 16' Side Panels  
 and 12'w x 5'h Heavy Duty Gates and  
 Anchors the front of the Roping Chute.

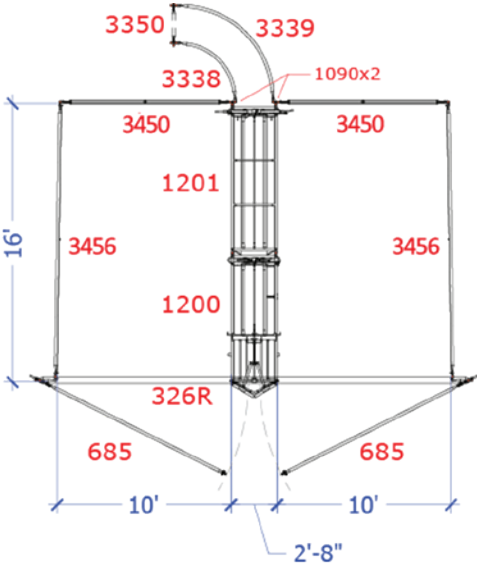

Second Stage Roping Chute  
 Item #1201

First Stage Roping Chute  
 Item #1200

- Built to PRCA and CPRA specifications.
- Manufactured using minimum 60,000 psi, high tensile steel tubing.
- Contoured sheeting used on the bottom 35" keeps your stock facing forward.
- Release gate springs open and locks securely.
- Equipped with quick access barrier gates on both sides of the chute.
- Operator access gate allows access to stock.
- Stock flow can be easily controlled with the side-tilt tailgate.

*\* Denotes non-stock items.*

Call us at Hi-Hog for planning, quotes and design assistance.

Timed Event Box Components		
Description	#	Weight (lbs)
First Stage Roping Chute	1200	570
Second Stage Roping Chute	1201 *	425
Roping Box - Front U Frame	326R *	409
12' x 5' Heavy Duty Gate	685	148
16' x 6' Panel - Sheeted 48" high	3456 *	364
10' x 6' Panel - Sheeted 48" high	3450 *	224
Curved Entry Panel - 38" Radius	3338 *	72
Curved Entry Panel - 64" Radius	3339 *	105
24" wide Alley Spreader	3350 *	38


## QUICK DRAW SORTING ARROW

Sorting Pens are critical to the success of timed events where competitors draw for their calf or steer. Neither the cowboys nor the audience want to wait while you struggle to cut a specific animal out of a pen.

The Quick Draw diagonal feed system makes it easy to load your stock into individual pens. Loading the correct draw is now as easy as opening the gate on the pen that holds the number you are looking for.

Each set will hold four head. By extending the sort alley or mirroring the sort alley you can increase the number of pre-sort pens in multiples of four.

The 7 rail sorting gates keep heads out of the alley. The leadup alley is 24" wide.

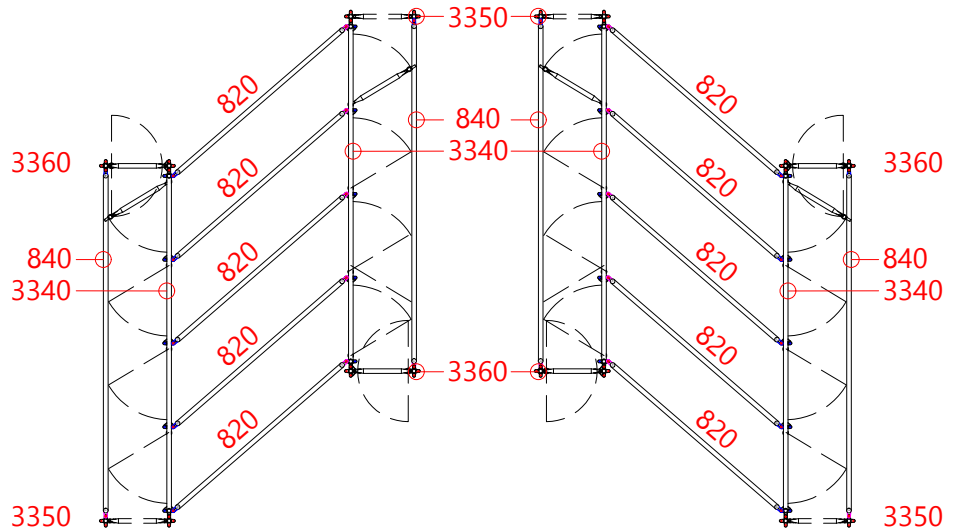


Diagonal Sorting System Components		
#	Description	Weight (lbs)
3340 *	12' Diagonal Feed Panel	257
3350 *	24" wide steer alley spreader	38
3360 *	24" wide steer alley spreader / swing gate	71
820	8' wide x 5' high Heavy Duty Panel	87
840	12' wide x 5' high Heavy Duty Panel	124



#3340 - 12' DIAGONAL FEED PANEL

\* Denotes non-stock item

## GET THE BEST PLAN FOR YOUR RODEO

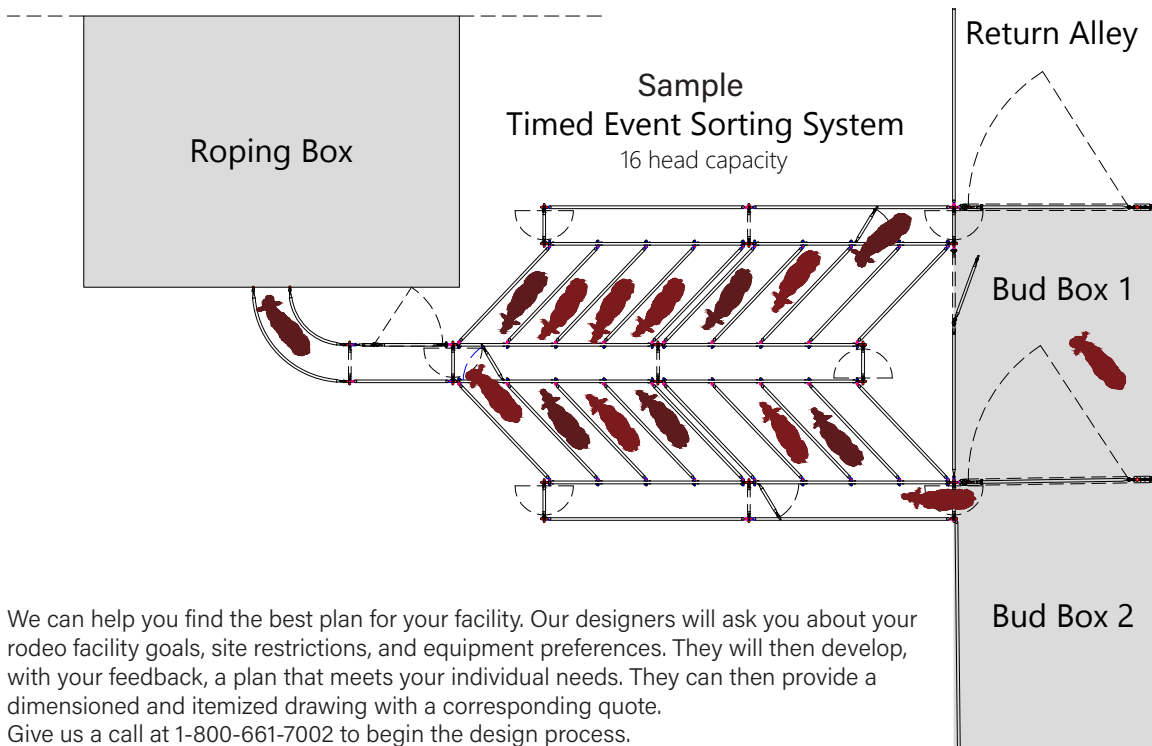


We can help you find the best plan for your facility. Our designers will ask you about your rodeo facility goals, site restrictions, and equipment preferences. They will then develop, with your feedback, a plan that meets your individual needs. They can then provide a dimensioned and itemized drawing with a corresponding quote. Give us a call at 1-800-661-7002 to begin the design process.





See More Sample Rodeo Systems on our Website

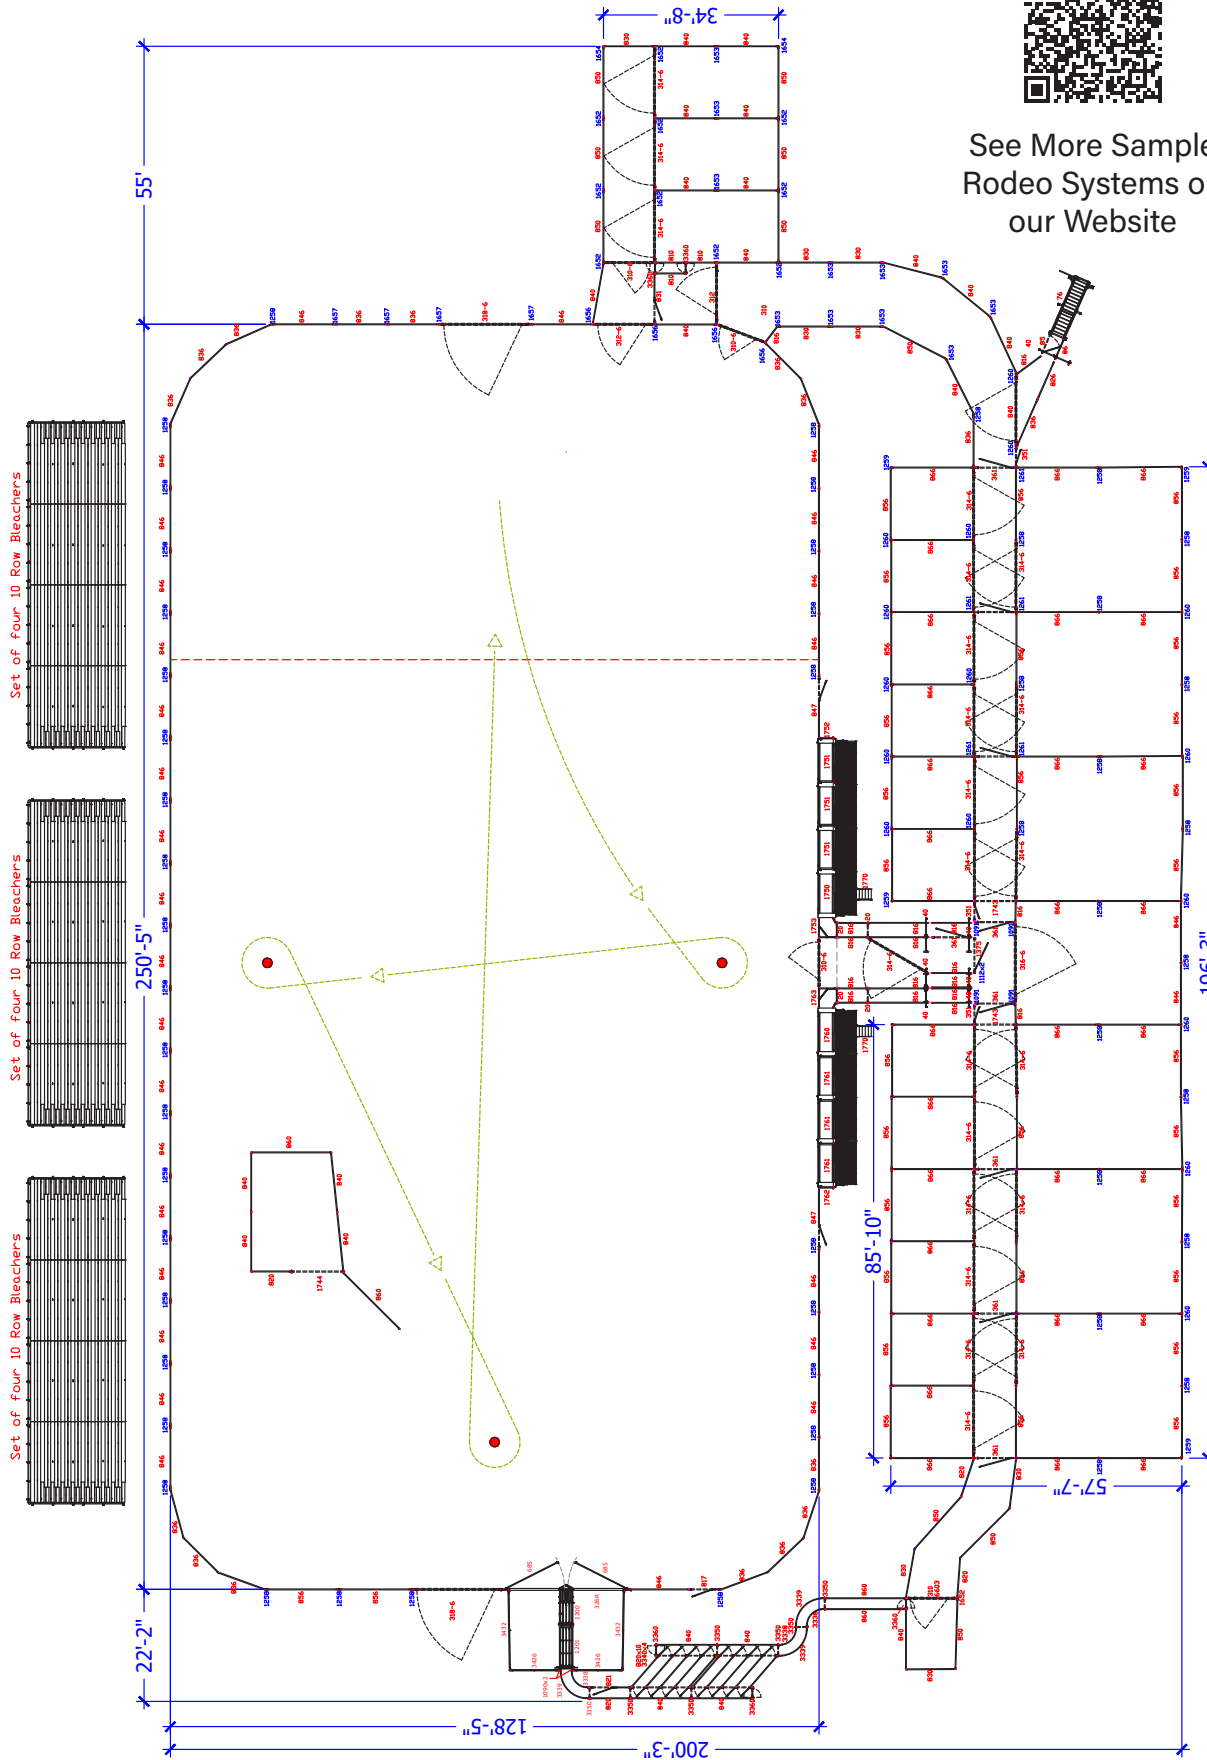

From inspiration to completion, a detailed plan is essential to building your Rodeo Facility. Let Hi-Hog's experienced Rodeo Designers help. If you need some inspiration you can find several sample designs on Hi-Hog's website by following the QR Code. There you will find lots of sample arena designs for timed event, rough stock, combination rodeo, team penning, sorting, cutting and pleasure riding. Call Hi-Hog, toll free at 1-800-661-7002 to begin the design process. Detailed CAD drawings and a quote will get your project built.

## 5 AND 10 ROW BLEACHERS



5-Row Bleacher Frame Set - Stairs Right

Hi-Hog's durable five and ten row Bleacher Frames are built to meet ICC 300-2012 Standards.

Each bleacher section measures 16' in length. If you require additional seating, the bleacher frames can be attached end-to-end.

To allow for stairs, the frame needs to be ordered for a left-hand or right-hand set of stairs. Stairs must be located next to a hand rail.



3 sets of 10-Row Bleachers; two frames with stairs

If you intend to combine your bleachers, please contact our sales office so we can assist you in ordering the correct parts.

A single 5-Row Bleacher assembly will seat approximately 53\* people (42 people with stairs).

A single 10-Row assembly will seat approximately 106\* people (82 people with stairs).

\* Based on 18" for an individual seat.

If your bleachers are located on a soft surface such as grass, or if you may need to move your bleachers, you can add the optional skid frame to the base of the bleacher frame (as shown).

The bleacher package includes steel frame and steel frame fasteners. Install on a level surface. Bleachers should be properly anchored to resist wind loads. *Wood and wood fasteners are not included Assembly Required*

## PICNIC TABLE FRAMES



Hi-Hog Picnic Table Frames are built to last. Ideal for Public Parks and Campgrounds.


The angled bench support prevents the table from tipping if there are people seated on one side only.

Hi-Hog's walk through Picnic Table Frames are made from 1.5" OD 14 gauge, minimum 60,000 psi high tensile steel tubing.

*Wood not included, Some assembly required*

Picnic Table Frames		
Description	#	Weight (lbs)
Picnic Table Frame	8446	46

## CAMPFIRE GRILL/ FIRE BOX

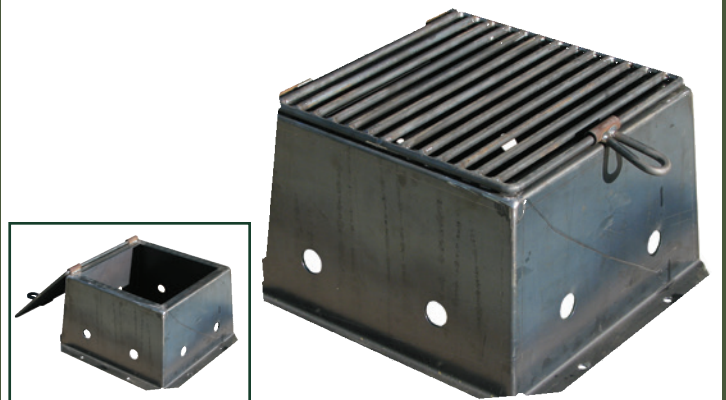

The Fire Box includes a grill that swings safely out of the way. 1-1/2" diameter air holes are cut around the perimeter of the base to allow superior airflow. The base plate includes 1/2" diameter holes for secure anchoring.

The grill measures 18" x 18" and is made with 1/2" Round Bar. The overall footprint of the fire box is 25" x 25", and the box is 12 1/2" high.

Additional designs and options are available.

Fire Boxes		
Description	#	Weight (lbs)
Standard Fire Box	8972	61



**PARK BENCH FRAMES**

**UTV CATTLE GUARD**



Relax, Hi-Hog's contoured metal Park Bench kit. The DIY Park Bench kit includes two heavy duty park bench supports (item 6160, 58 lbs.).

The bench frame is carefully formed to ensure each plank mounts flush with the steel support.

The formed base shifts the load to the outside of the base frame to provide stable footing.

*Wood not included, assembly required \* Special Order*



Hi-Hog's UTV Cattle Guard crossing makes it easy for you to move through your fence lines and into other pastures without going through a gate.

There's no need to dig a hole. Simply cut your fence, lay the cattle guard on the ground, and re-attach your fencing, done!

*\* Special Order*

Park Bench Frames		
Description	#	Weight (lbs)
Park Bench Frames	6160 *	58

ATV Cattle Guard		
Description	#	Weight (lbs)
UTV Cattle Guard	3931 *	317



**TALK TO A HI-HOG EXPERT**

Toll-free in mainland North America: 1-800-661-7002

Outside of North America: 1-403-280-8300

Fax: 1-403-280-2441

**Hi-Hog's head office is located at**

8447 - 23rd Avenue N.E., Calgary , AB

Come say hello and check out our display systems.


**CATTLE BISON EQUINE RODEO PARKS**

[www.hi-hog.com](http://www.hi-hog.com)

[www.hi-hog.com/dealer-locator](http://www.hi-hog.com/dealer-locator)



Visit our Web-Site



Find a Dealer