



# Paddock Slab #1336

MESH STRUCTURE WITH CONNECTION SYSTEM

## SPECIFICATIONS

Length	50 cm – 19.69"
Width	40 cm – 15.75"
Height	4 cm – 1.58"
Weight/slab	2.1 kg – 4.63 lbs
Weight/m <sup>2</sup>	10.5 kg – 23.15 lbs
Coverage/slab	0.20 m <sup>2</sup> – 2.15/ft <sup>2</sup>
Coverage	5 units/m <sup>2</sup> – 5 units = 10.76 ft <sup>2</sup>
Items/pallet	156 pieces
Coverage/pallet	20 m <sup>2</sup> – 215.28 ft <sup>2</sup>
Material	100% recycled polythene and polypropylene
Connection	T slugs and slots
Colour	Black

## KEY FACTS

- » Paddock Slab must be filled with some sort of sand, soil, pea gravel or clay.
- » Excellent water permeation through the surface
- » Durable, non-rotting and weather resistant
- » High stability due to strong web
- » Frost and UV-resistant
- » Low maintenance and cost effective throughout the product life
- » The lightweight interlocking design enables ease and speed of installation
- » Paddock Slabs reduces the carbon footprint of a project and it is completely recyclable

### Permeable design

Offers excellent water permeation through the surface.

### Load capacity

Suitable for load class SLW 60 according to DIN1072.

### Perfect design

Ideal for horses.

### Ground erosion


Prevents erosion of earth, ideal at gateways and feeding points.

### Environmentally friendly

Manufactured from 100% recycled plastic.

### Stable

Connection fit improves stability once units are in position.

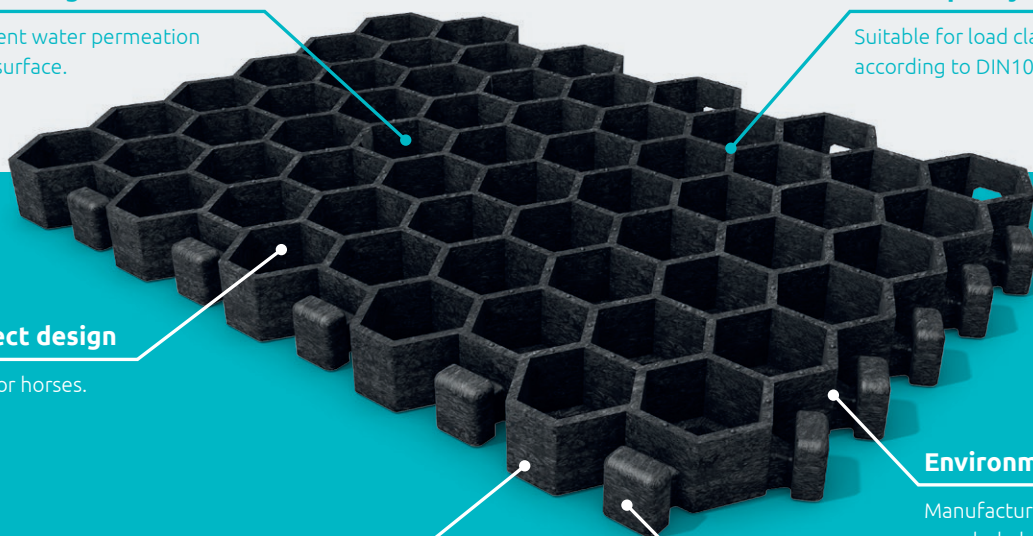

TESTING ON ARTIFICIALLY MADE BEDDING

Test load (kN)	Crack detection	Breaking force (kN)	Test temperature
180	Non	225	20 °C – 68 °F
180	Non	228	20 °C – 68 °F

TESTING ON RIGID BASE

Test load (kN)	Crack detection	Load at plastic deformation (kN)	Test temperature
180	Non	257	20 °C – 68 °F
180	Non	263	20 °C – 68 °F

EVALUATION OF TEST RESULTS

All the tested Paddock Slabs are to be considered as sufficiently capable of bearing the passage of a category SLW 60 heavy duty truck. Sufficient load bearing capacity of the ground according to the provisions of ZTV SoB 04 [2] is a prerequisite. The tested ground reinforcements are suited for application in fire lanes and parking areas for heavy utility vehicles.

LAYING INSTRUCTIONS

For areas under heavy usage (riding arena, lunging ring) we recommend an installation in layers consisting of a base layer, an equalising layer, the paddock slab with filling material as separating layer and a top layer or footing.

A permeable layer (approx. 20–25 cm) of crushed rock, lava or gravel ② is applied to soil with good bearing capacity ① and compacted afterwards. A 2–4 cm equalising layer of grit ③ is subsequently applied and levelled.

The slab ⑤ serves as separating layer. It is filled with grit, sand or gravel and prevents the mixing of base and footing layer. Separation can be improved by placing a permeable fibrous web ④ under the slab.

Finally, the footing ⑥ is applied. It may consist of sand, wood chips, fabric based or similar material.

For use in less stressed areas (paddocks, feedlots, access paths):

Paddock Slab must be filled with some sort of sand, soil, pea gravel or clay.

1 yard of Pea Gravel will provide coverage for 120 pieces of Paddock Slab.

#1336 Paddock Slab can be ordered by the Piece or the Pallet. (156 Paddock Slabs)

